



Office of Federal Lands Highway

U.S. Department of Transportation
Federal Highway Administration

Associate Administrator
John Baxter
202-366-9494
john.baxter@dot.gov
www.fhwa.dot.gov/flh/

Federal Lands Highway provides planning, design, and engineering services to support the highways and bridges that provide access to and within federally owned lands.



Central Federal Lands



Division Engineer
Ricardo Suarez
720-963-3448
ricardo.suarez@fhwa.
dot.gov
www.cflhd.gov

February 2008
See FLH website for sources

Federal Lands Highway Program (FLHP)


Improving transportation to and within federal and tribal lands



Utah FLHP

UT FLHP road miles: **2,900**
Funding Authorized FY 98 – 07:
\$126,610,000
Federal land acreage as percentage
of total state area: **96.9%***
UT population: **2,550,063**

- ◆ National Park Service (17 units)
- U.S. Forest Service (6)
- ▼ Bureau of Indian Affairs/
Tribal Governments (7)
- ✱ U.S. Fish and Wildlife Service (3)

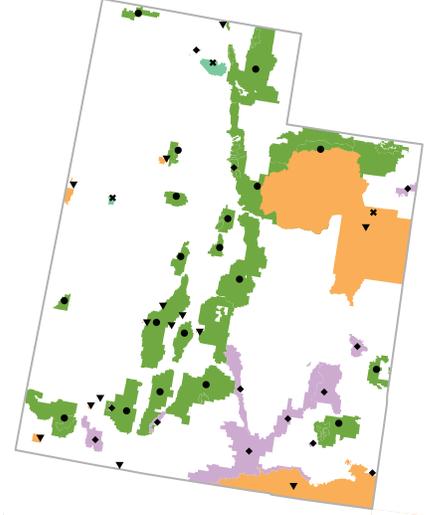

* This percentage includes Federal lands that are not part of the FLHP core program and not depicted on the map.

The Federal Lands Highway Program

in Utah. Zion Canyon Scenic Drive, located in Zion National Park, provides access to marquee attractions like the Emerald Pools, Great White Throne, the Grotto, Angels Landing, Weeping Rock and the Temple of Sinawava. In May 2000, the park began shuttle bus access to these attractions during high visitation season. Using shuttles accelerated pavement failures, since the existing pavement was not designed for continuous shuttle bus use.



In 2002, Central Federal Lands Highway Division (CFLHD), in partnership with the National Park Service, began working on repair of the 7.7-mile segment. The existing pavement section was recycled and stabilized with asphalt to form a base for a new structural section. The process minimized the costs of reconstruction and the impact

to the environment. The project also included safety enhancements such as rumble strips, minor road widening, relocating crosswalks, and eliminating hazardous unplanned pullouts. The segment was completed in 2005 with \$3.8 million in Federal Lands Highway Program funds.