
| LENGTH AND SPACING TABLE | | | | | | | |
|--------------------------|------|--------|---------------------|-------|-------|--|--|
| APPROACH | | BUFFER | CHANNELIZING DEVICE | | | | |
| | ED* | SPACE | TAPER BUFFER | | WORK | | |
| SILLD | | LENGTH | AREA | SPACE | SPACE | | |
| MPH | km/h | METER | SPACING IN METERS | | | | |
| 20 | 30 | 35 | 6 | 12 | 12 | | |
| 25 | 40 | 45 | 6-7.5 | 15 | 15 | | |
| 30 | 50 | 60 | 6-9 | 18 | 18 | | |
| 35 | 55 | 75 | 6-10.5 | 21 | 21 | | |
| 40 | 65 | 95 | 6-12 | 24 | 24 | | |
| 45 | 70 | 110 | 6-13.5 | 27 | 27 | | |
| 50 | 80 | 130 | 6-15 | 30 | 30 | | |
| 55 | 90 | 150 | 6-16.5 | 34 | 34 | | |
| 60 | 95 | 175 | 6-18 | 37 | 37 | | |
| 65 | 105 | 195 | 6-19.5 | 40 | 40 | | |
| 70 | 115 | 225 | 6-21 | 43 | 43 | | |

* Approach speed based on the regulatory posted speed, not the advisory speed.

| SIGN SPACING TABLE | | | | | | |
|---|-------------------------------------|-----|-----|--|--|--|
| ROAD TYPE | DISTANCE BETWEEN SIGNS IN METERS | | | | | |
| | A | В | С | | | |
| Urban and Rural \leq 50 km/h [\leq 30 MPH] | 30 | 30 | 30 | | | |
| Urban and Rural 60-80 km/h [35-50 MPH] | 100 | 100 | 100 | | | |
| Rural greater than 80 km/h [50 MPH] | 150 | 150 | 150 | | | |
| Expressway / Freeway | 300 | 450 | 800 | | | |

NOTE:

- 1. Signs are shown for depicted for the oppo
- If the area approach passing zone, add sig pavement markings.
- 3. If the tangent distance an appropriate Rever Curve sign (W24-1). in advance of the sec Reverse Turn signs (V recommended speeds
- 4. If the diversion is con WORK AHEAD (W20-
- 5. Place channelizing de
- 6. Do not allow equipmo buffer space.

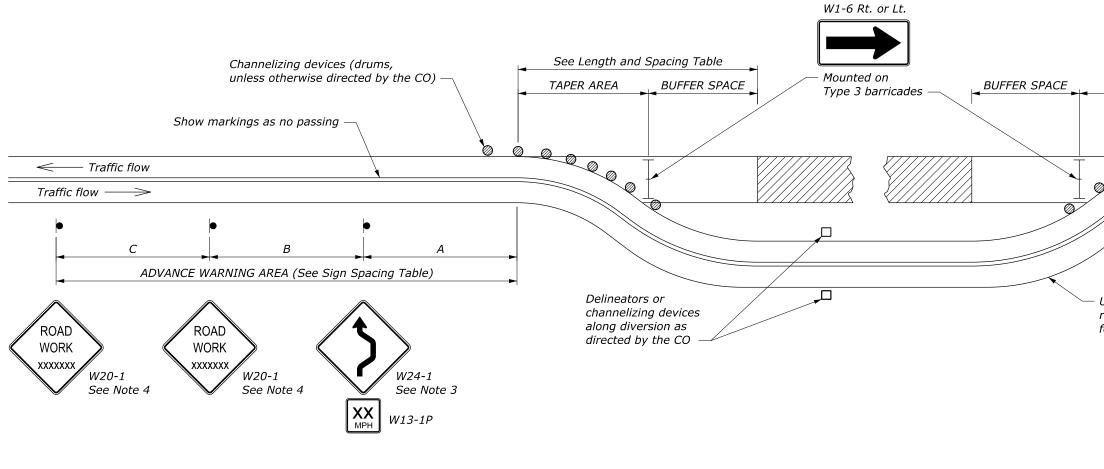

| | | PROJECT | SHEET NUMBER | | | |
|---|--|--|----------------------------|--|--|--|
| | | | | | | |
| | | | i i | | | |
| | | | | | | |
| one direction osite directio | | Place signs similar to | o those | | | |
| | | igned and marked as ropriate. Remove co | | | | |
| rse Curve sig Install a se cond reverse (W1-3) inste | gn (W1-4) instea cond, appropriat c curve back to th | rsion is more than 18 d of the Double Reve e Reverse Curve sign he original alignment prsion has sharp curv ss. | erse n (W1-4) r. Use | | | |
| | hin the project lii ROAD WORK (G | mits, eliminate the R 20-2) signs. | OAD | | | |
| evices outsic | le temporary roa | dway. | | | | |
| ent, materia | ls, or vehicles to | be parked or stored | in the | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| TAPER AF | REA | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| 000 | | | | | | |
| Ø / | | | | | | |
| | | | | | | |
| | | • | , | | | |
| | | A | | | | |
| | | > | | | | |
| | | END | | | | |
| | t the minimum he signed speed | ROAD V | | | | |
| for all diver | | G20-2 See No | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| 1 | | PARTMENT OF TRANSPORTAT | ION | | | |
| | FEDERA | AL HIGHWAY ADMINISTRATION | NC | | | |
| | | FRIC FLH STANDARD | | | | |
| | TEMPORA | RY TRAFFIC C | | | | |
| FOR DIVERSION | | | | | | |
| | | | | | | |
| SCALE | STANDARD APPRO REVISED: 7/2022 | VED FOR USE 6/2005 | standard M635-4 | | | |
| | | | 11055-4 | | | |