




LENGTH AND SPACING TABLE					
APPROACH SPEED*		BUFFER SPACE LENGTH METER	CHANNELIZING DEVICE		
MPH	km/h		TAPER AREA	BUFFER SPACE	WORK SPACE
SPACING IN METERS					
20	30	35	6	12	12
25	40	45	6	15	15
30	50	60	6	18	18
35	55	75	6	21	21
40	65	95	6	24	24
45	70	110	6	27	27
50	80	130	6	30	30
55	90	150	6	34	34
60	95	175	6	37	37
65	105	195	6	40	40
70	115	225	6	43	43

* Approach speed based on the regulatory posted speed, not the advisory speed.

SIGN SPACING TABLE			
ROAD TYPE	DISTANCE BETWEEN SIGNS IN METERS		
	A	B	C
Urban and Rural ≤ 50 km/h [≤ 30 MPH]	30	30	30
Urban and Rural 60-80 km/h [35-50 MPH]	100	100	100
Rural greater than 80 km/h [50 MPH]	150	150	150
Expressway / Freeway	300	450	800

NOTE:

- Signs are shown for one direction of travel only. Place devices similar to those depicted for the opposite direction of travel.
- Final location and spacing of signs and devices may be changed to fit field conditions as approved by the CO.
- For pilot car operation, mount the PILOT CAR FOLLOW ME (G20-4) sign at a conspicuous location on the rear of vehicle. Prominently display the name of the contractor on the pilot car.
- If closure is completely within the project limits, eliminate the "ROAD WORK AHEAD" (W20-1) and "END ROAD WORK" (G20-2) signs.
- For night time flagging operation, provide floodlighting at flagger stations.
- For project specific minimum width, refer to the Special Contract Requirements, Section 156.
- Do not allow equipment, materials, or vehicles to be parked or stored in the buffer space.

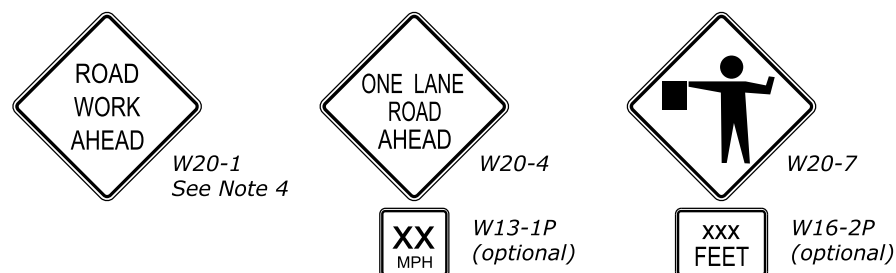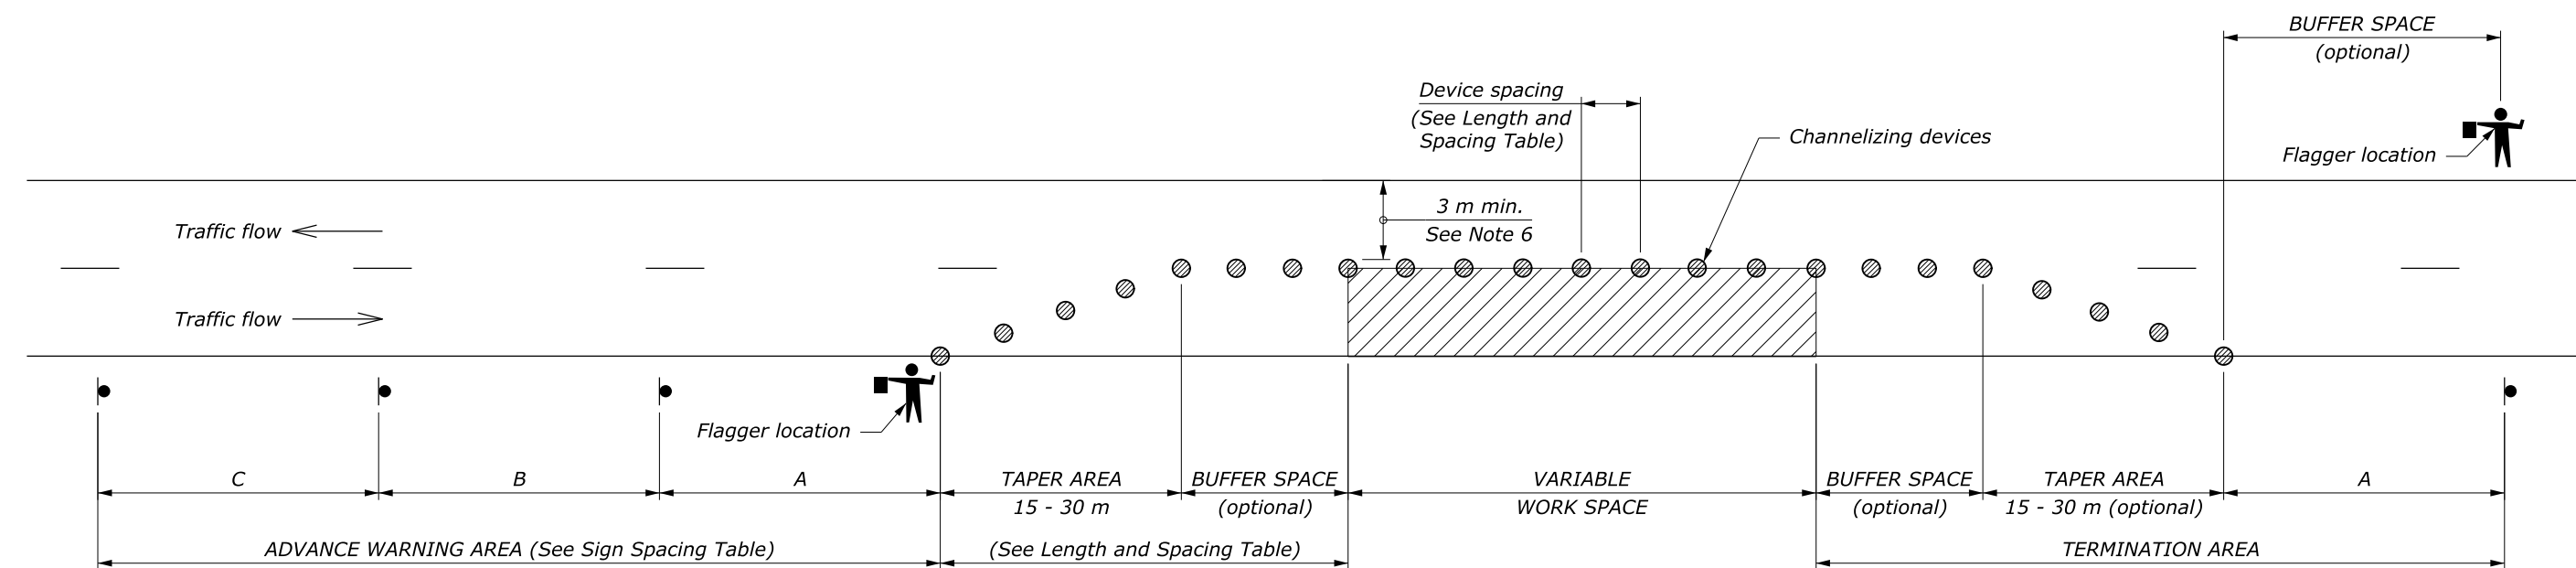

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
FEDERAL LANDS HIGHWAY

METRIC STANDARD

**TEMPORARY TRAFFIC CONTROL
SINGLE LANE CLOSURE LAYOUT
(WITH FLAGGERS)**

STANDARD APPROVED FOR USE 6/2005	STANDARD M635-6
REVISED: DRAFT: 8/2013	

NO SCALE