
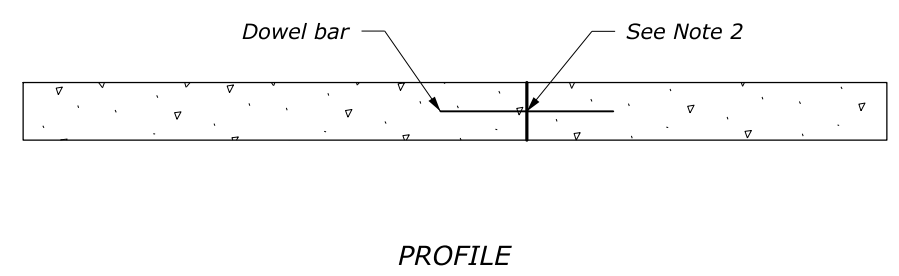




NOTES:

1. Provide the same type of dowel assemblies and tie bars for joints in plain portland cement concrete pavement as shown for joints in reinforced pavement.
2. See Detail ET 501-2 for joint and joint sealing details.
3. Lap longitudinal and transverse reinforcement not less than 15 inches..

PAVEMENT THICKNESS (IN)	TRANSVERSE JOINT SPACING (FT)
$T < 6$	10
$6 \leq T < 12$	15

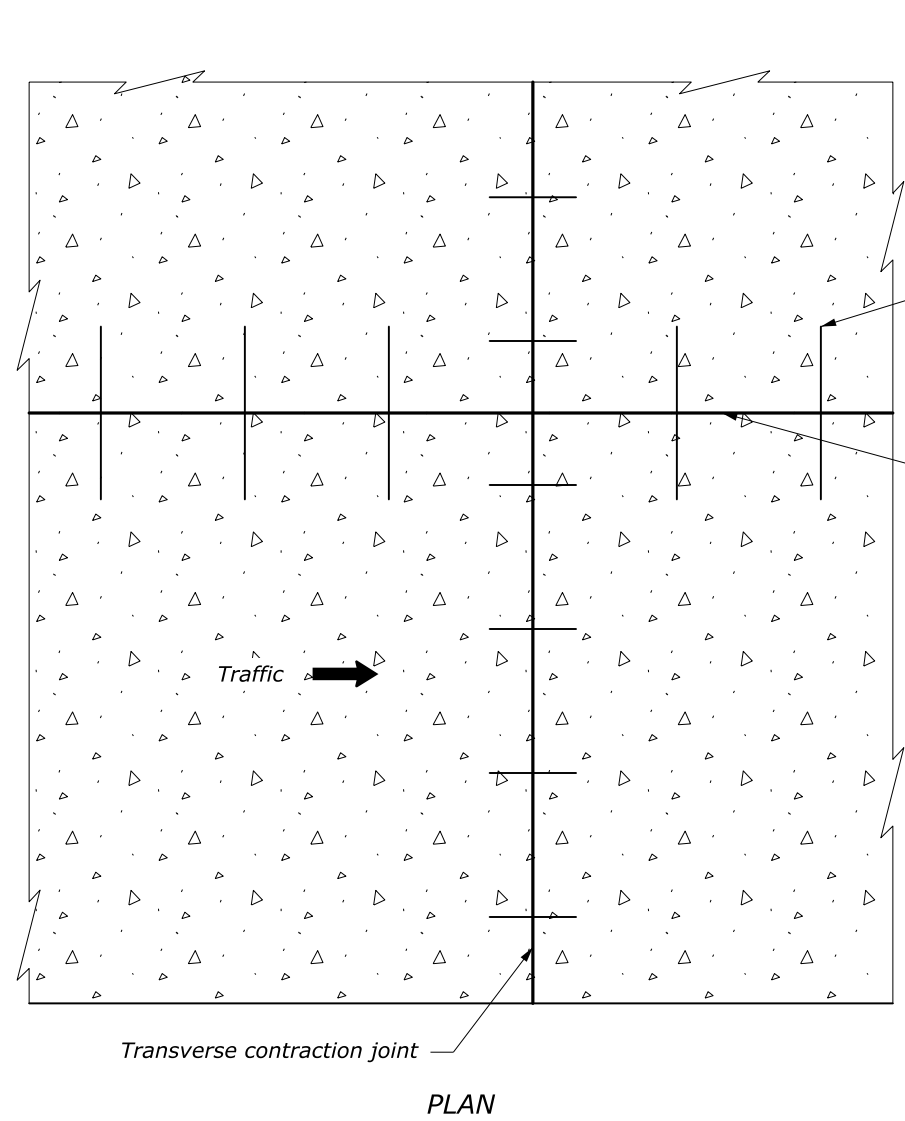

PLAIN MINOR CONCRETE PAVEMENT

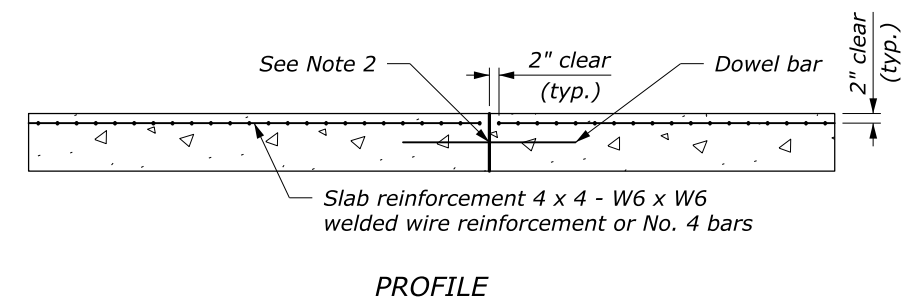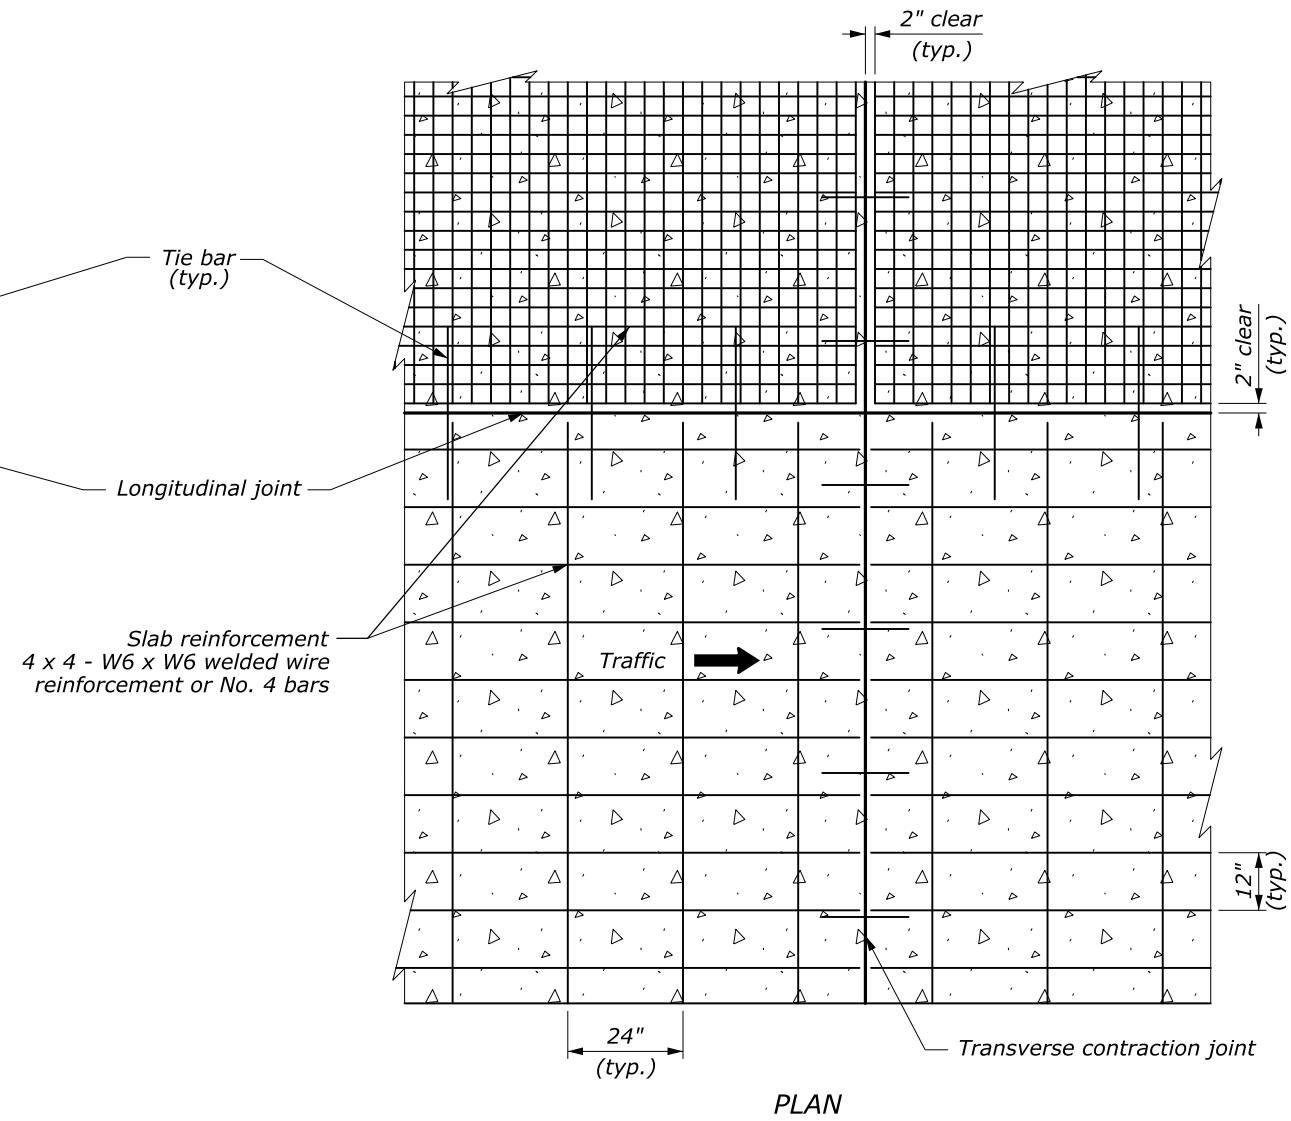

REINFORCED MINOR CONCRETE PAVEMENT

M:\PROJECTS\COLLABORATION\Louisayne_02172021_Details_Workst50101_EFL_TEMP.dgn [Sheet] 17 February 2021 3:09 PM

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION OFFICE OF FEDERAL LANDS HIGHWAY	
EFLHD DETAIL	
MINOR CONCRETE PAVEMENT	
REVISIONS: 9/2016 9/2020	DETAIL ET 501-1