
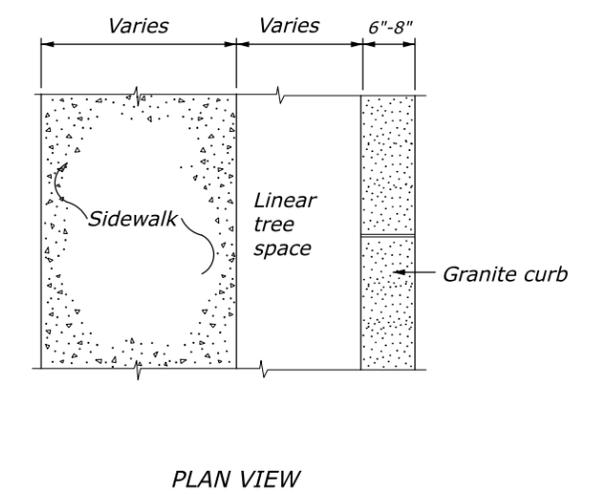
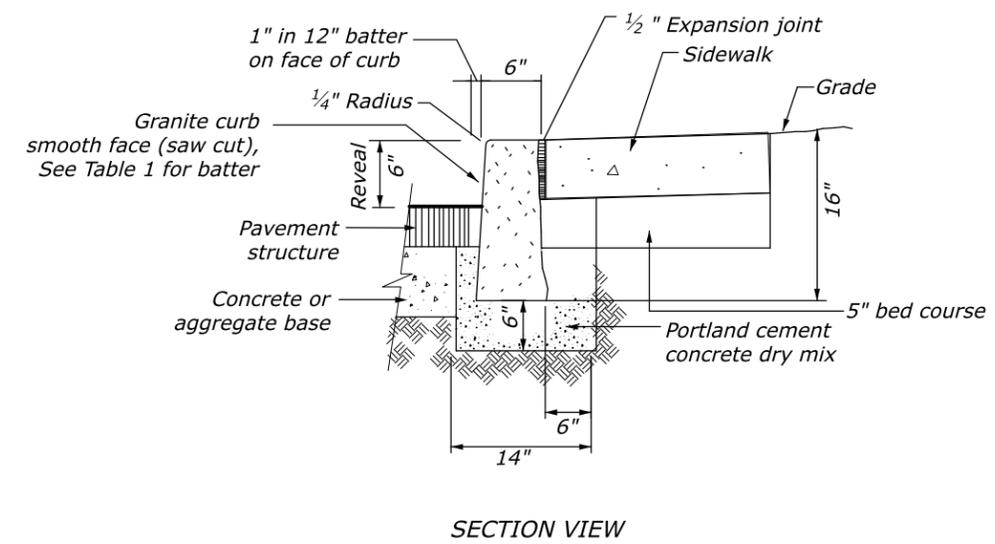
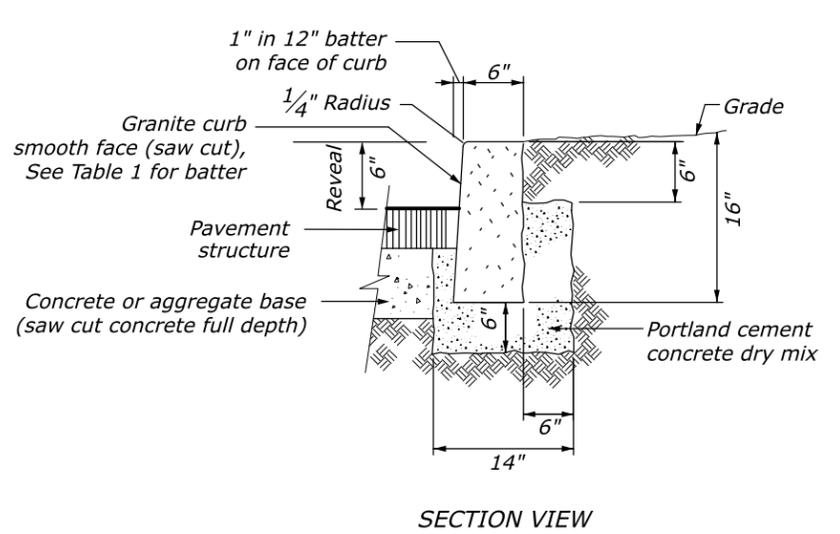
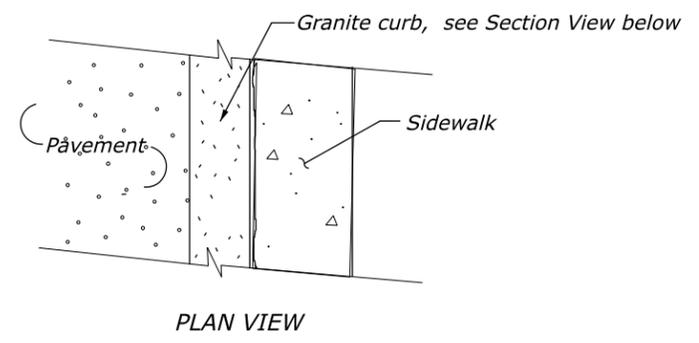


**NOTE:**  
Place transverse expansion joints at intervals of not more than 60 feet for curbs and sidewalks.

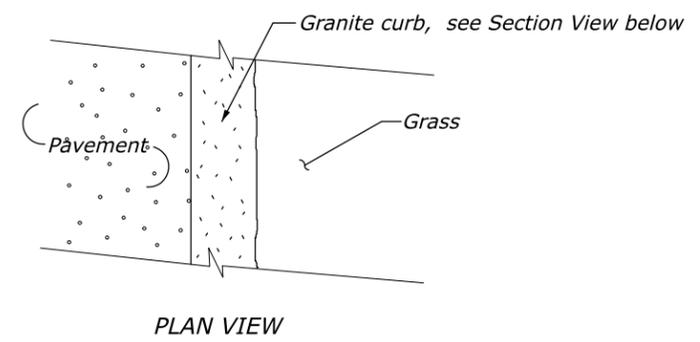

**STONE CURB TYPE 1, 16" DEPTH (GRANITE TYPE A OR B) (WITHOUT SIDEWALK)**

**STONE CURB TYPE 1, 16" DEPTH (GRANITE TYPE A OR B) (WITH SIDEWALK)**

**STONE CURB TYPE 1, 16" DEPTH (GRANITE TYPE A OR B) (WITH SIDEWALK AND LINEAR TREE SPACE)**

**TABLE 1**

BATTER FOR GRANITE CURB	
TYPE	BATTER (H:V)
A	1:12
B	3/4:10

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION OFFICE OF FEDERAL LANDS HIGHWAY	
EFLHD DETAIL	
<b>GRANITE CURB</b>	
DETAIL APPROVED FOR USE	DETAIL
APPROVED: MAY 2011	E609-02
REVISED: SEPTEMBER 2020	

NO SCALE

M:\Standards\_and\_Details\EFLHD\_Detail-Drawings\FP-14\FP-14\_ORD\_Version\ORD\_Ready\Section-609\ORD\st60903\_detail.dgn [Sheet] 19 January 2021 10:56 AM