

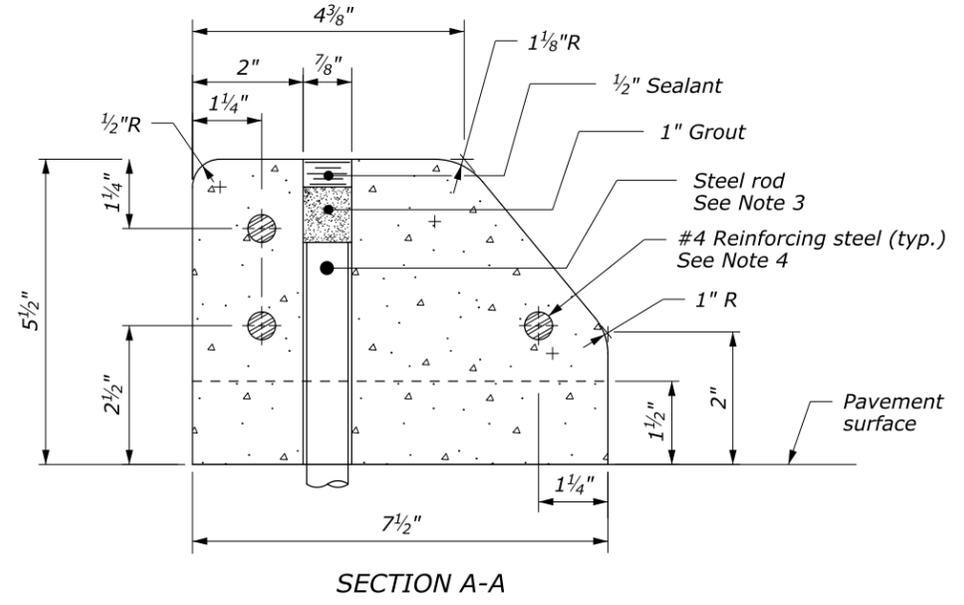
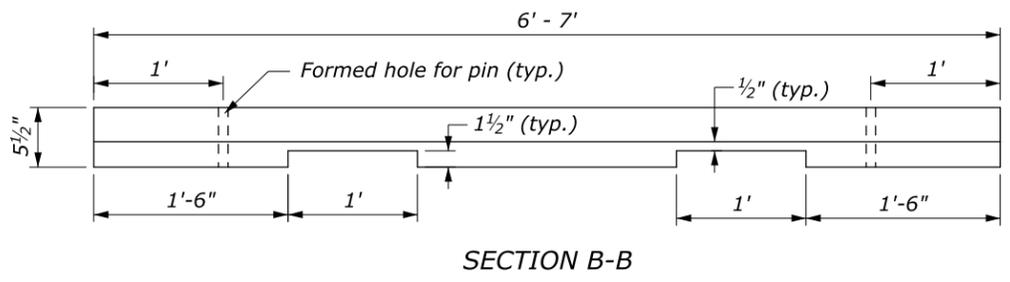
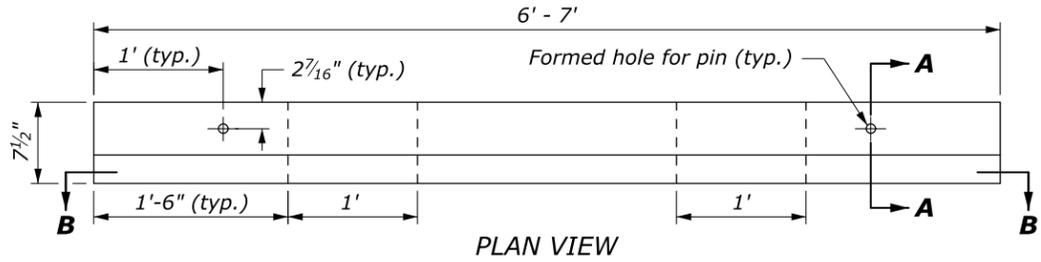


NOTES:


- Center wheelstops between and perpendicular to stall lines.
- Variations in wheelstops will be allowed to meet manufacturer's standards with the approval of the CO.
- Pin the wheelstops with No. 6 reinforcing steel or 3/4-inch steel rods according to Subsection 609.08.
- Extend the reinforcing steel to within 1 inch of ends of wheelstop.

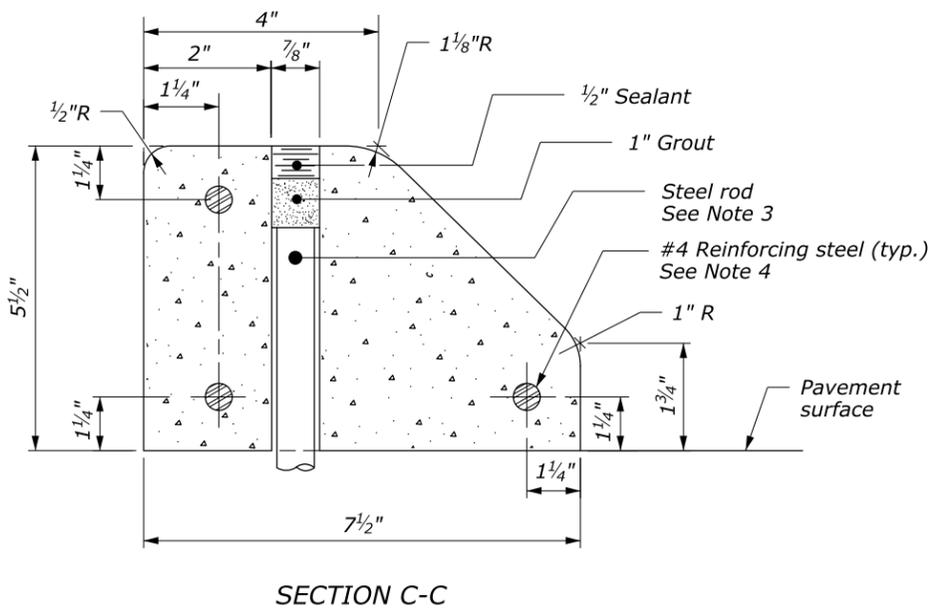


CONCRETE WHEELSTOP WITH DRAIN

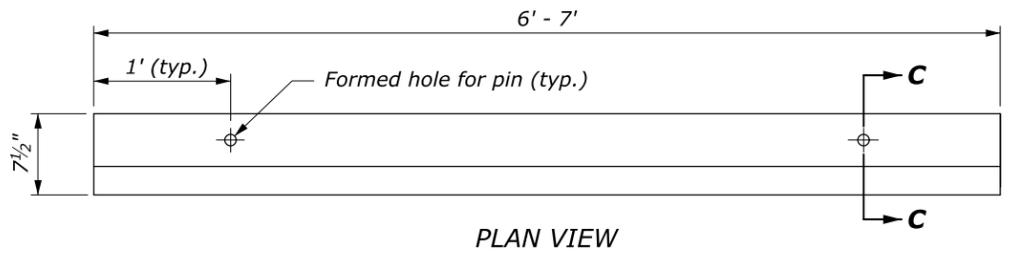

CONCRETE WHEELSTOP WITHOUT DRAIN

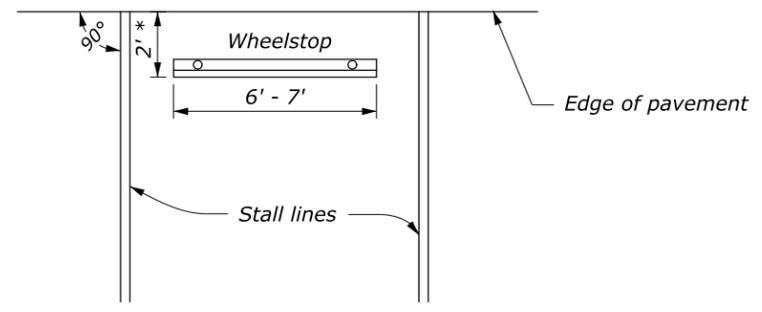

HEAD-ON PARKING

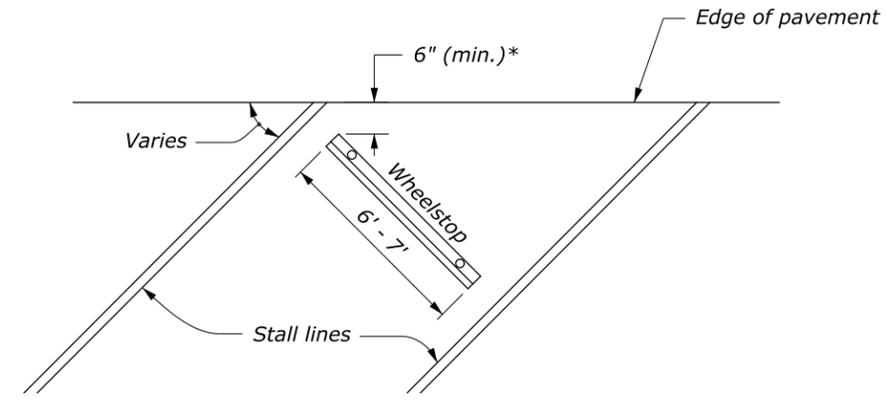

ANGULAR PARKING

WHEELSTOP LAYOUT

* Increase distance for wall or other obstructions as directed by the CO.

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION OFFICE OF FEDERAL LANDS HIGHWAY	
EFLHD DETAIL	
CONCRETE WHEELSTOP	
DETAIL APPROVED FOR USE APPROVED: MAY 2011 REVISED: SEPTEMBER 2020	DETAIL E609-03