

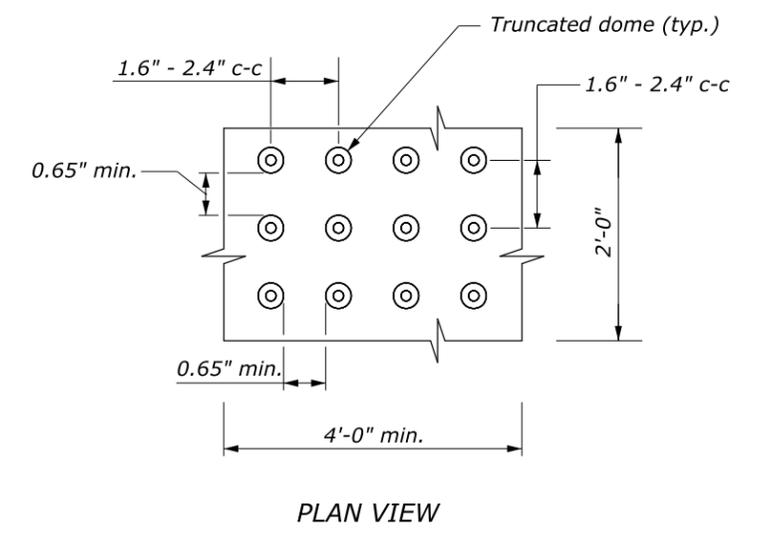
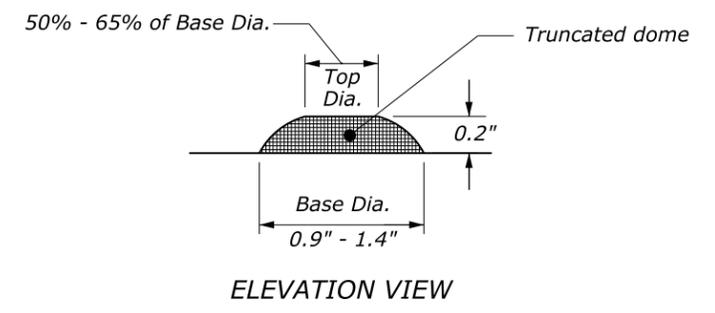
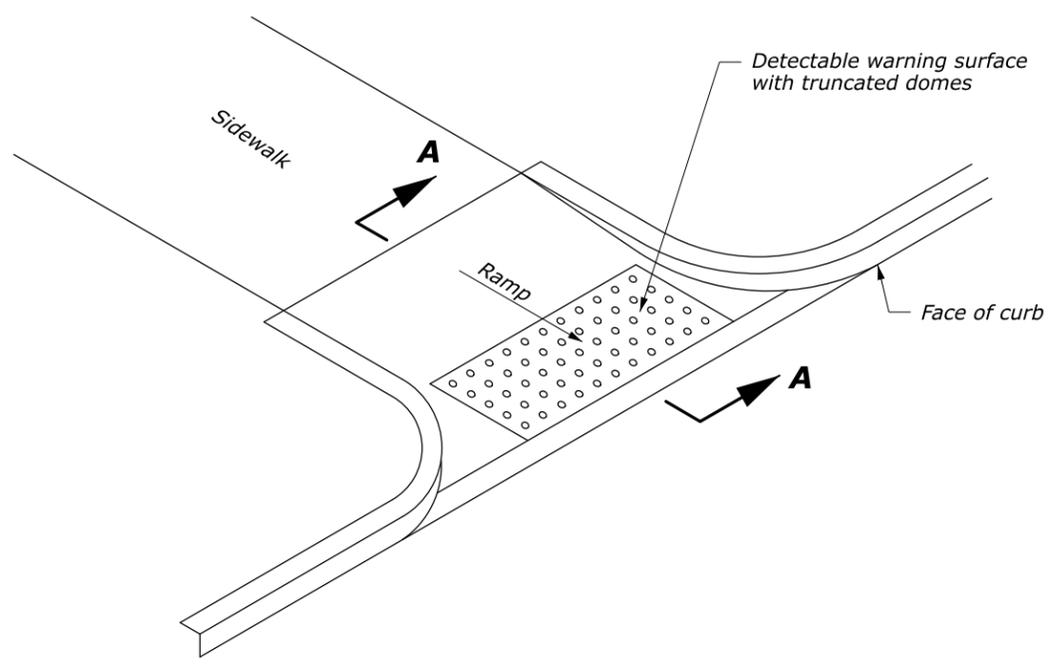


NOTES:

1. Use a coarse broom finish running perpendicular to the longitudinal slope on concrete surfaces, exclusive of the detectable warning surfaces.
2. Ensure the cross slopes of ramps do not exceed 2% in the direction perpendicular to the pedestrian traffic.
3. Construct curb ramp perpendicular to the curb, as shown in the plans, or as directed by the CO.

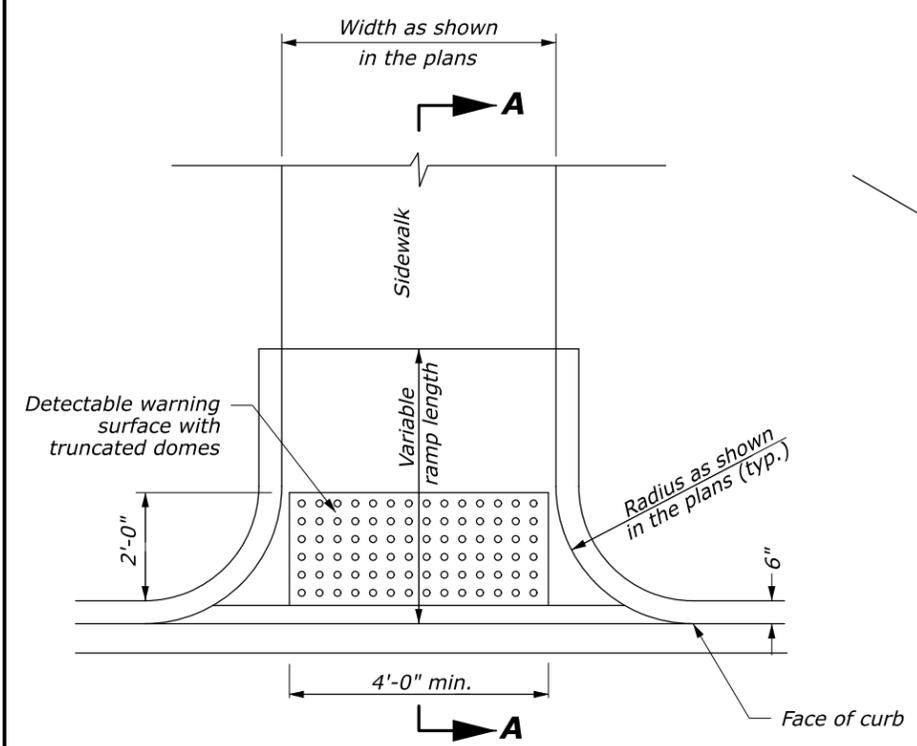

SIZE AND SPACING OF TRUNCATED DOMES

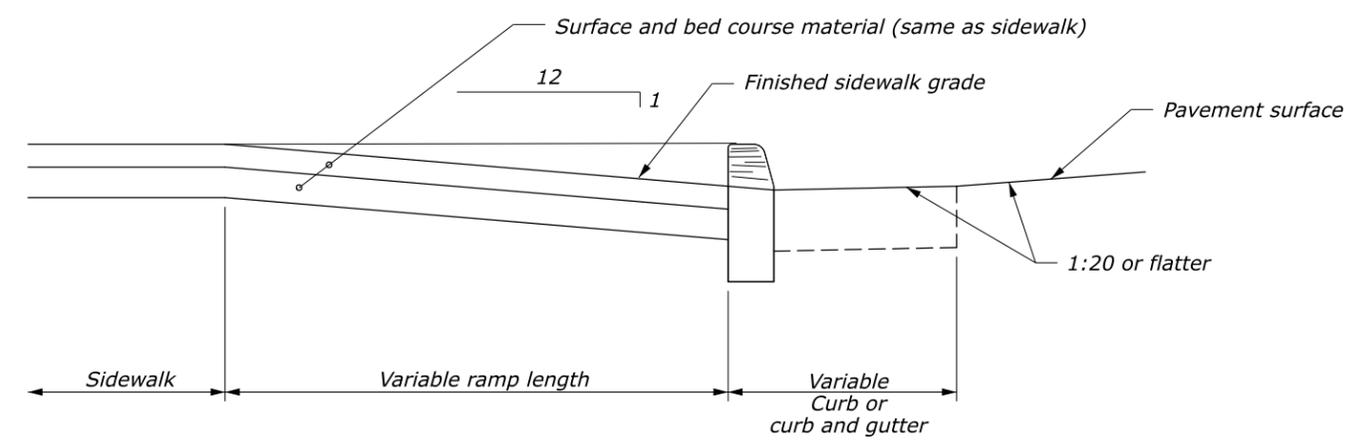

ACCESSIBILITY RAMP

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION OFFICE OF FEDERAL LANDS HIGHWAY	
EFLHD DETAIL	
ACCESSIBILITY RAMP CURB RETURN	
DETAIL APPROVED FOR USE	DETAIL
APPROVED: MARCH 2015	E615-05
REVISED: SEPTEMBER 2020	

NO SCALE