



**SINGLE POST SIGN**

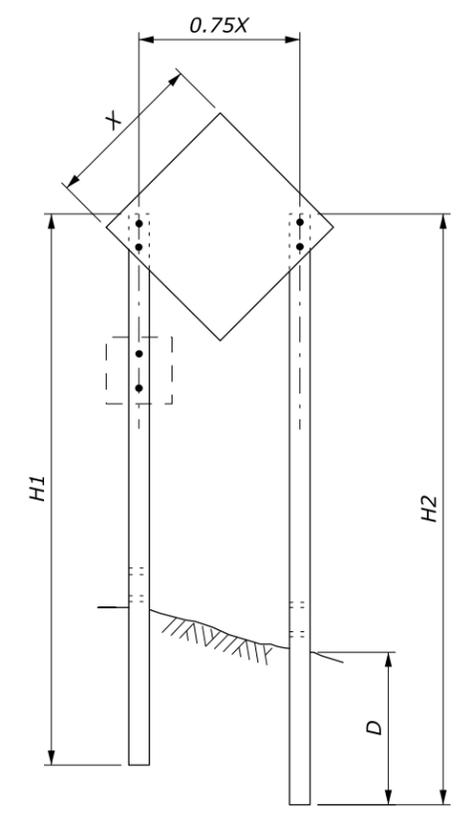


**DOUBLE POST SIGN**

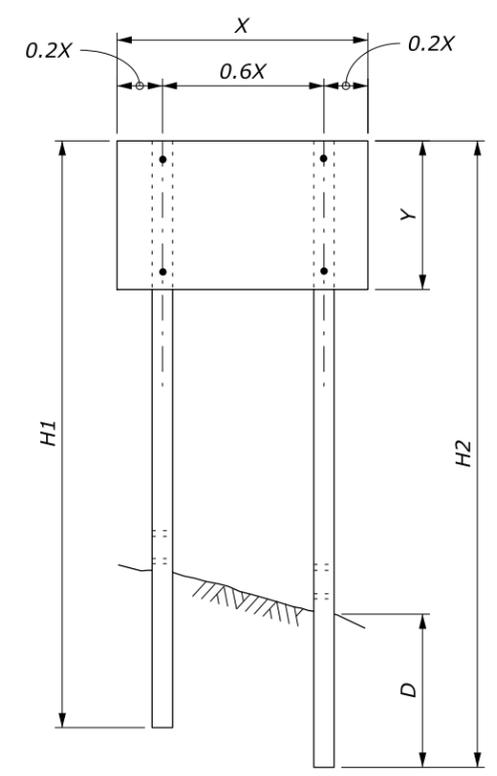


**NOTES:**

1. Attach sign panels with a minimum of two 1/4-inch diameter bolts per post.
2. H1 and H2 = Overall post length. Select post lengths to fit field conditions.
3. D = Post embedment depth for average soil conditions.
4. In areas where lateral distance is limited, a minimum lateral offset of 2 feet may be used. In areas with curbs, a minimum lateral distance of 1 foot behind the face of the curb may be used.
5. In pedestrian locations, or in areas with obstructed views, use 7-foot minimum mounting height for main sign and 6-foot minimum mounting height for secondary sign.
6. Use 7-foot minimum spacing between posts for sign posts 6- by 6-inch or larger.
7. State standards may be used as an alternative if approved by the CO.

<b>WOOD POST SELECTION TABLE</b>					
WIDTH "X"	AREA (SQFT)	NUMBER OF POSTS	POST SIZE (INCH)	D (INCH)	HOLE SIZE (INCH)
Diamond ≤ 36" Other Shapes ≤ 48"	< 10	1	4 x 4	36	0
		1	4 x 6	48	1.5
Diamond ≤ 48" Other Shapes ≤ 12'	10 - 20	1	6 x 6	48	2
		2	4 x 4	36	0
> 13'	20 - 50	2	4 x 6	48	1.5
		2	6 x 6	48	2
12' - 16'	50 - 65	3	4 x 6	48	1.5
> 17'	65 - 95	4	4 x 6	48	1.5
> 30'	65 - 95	3	6 x 6	48	2

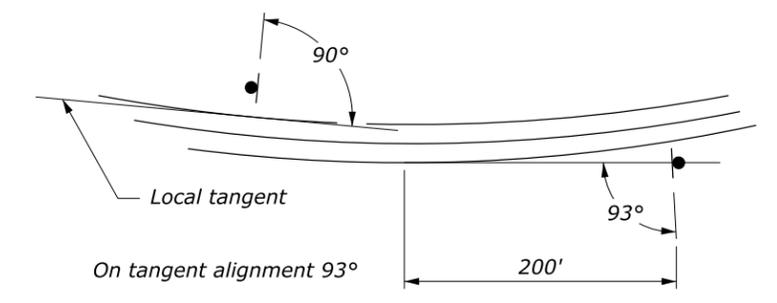

**SIGN INSTALLATION ANGLE**

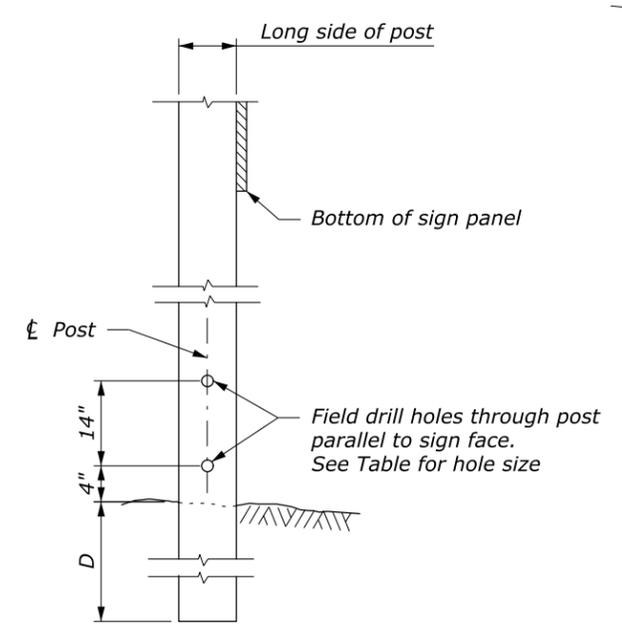

**POST DETAIL**

U.S. DEPARTMENT OF TRANSPORTATION  
 FEDERAL HIGHWAY ADMINISTRATION  
 OFFICE OF FEDERAL LANDS HIGHWAY

EFLHD DETAIL

**TEMPORARY TRAFFIC CONTROL  
 SIGN INSTALLATION  
 WOOD POSTS**

STANDARD APPROVED FOR USE 6/2005  
 REVISED: 10/2017 1/2018 9/2019 9/2020

DETAIL  
 ET 635-14

NO SCALE