


TOP VIEW

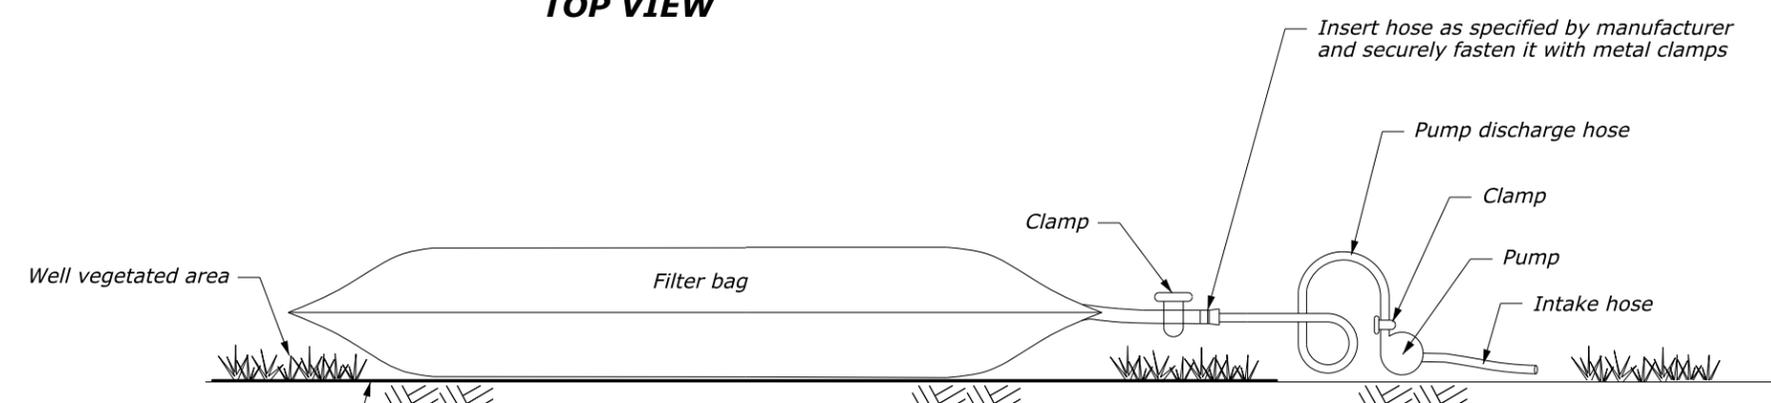

SIDE VIEW

NOTES:

1. Locate filter bags in level areas (less than 5% grade) or as approved by the CO. When level areas are not available, place geotextile and coarse aggregate to level the filter bags.
2. Locate filter bags in areas accessible by equipment for maintenance and removal.
3. Insert a maximum of one hose in each filter bag at any given time.
4. Inspect filter bags daily. Replace filter bags when 50% of the sediment capacity has been reached or when there is a failure. Have spare filter bags on site for replacement.
5. Do not permit discharge from the filter bags to drain back into work or access areas of the project. Discharge onto stable and erosion resistant areas.
6. Do not cut or empty filter bags on site. Restore the area according to Subsection 157.15.

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
FILTER BAG	
DETAIL APPROVED FOR USE	DETAIL
APPROVED: FEBRUARY 2013 REVISED: MARCH 2018	E157-10

23-Mar-2018 09:02 AM M:\Standards_and_Details\E\F\HLD_Detail\Drawings\FHLD_Detail\Labouchere\E157_detail\CADD\15710_detail.dgn