



NOTES:

1. Prepare cracks for sealing and filling according to Section 414. Follow manufacturer's recommendations for sealing and filling cracks.
2. Force crack repair material into cracks to ensure adhesion to existing surface.
3. See Subsection 414.06 for minimum crack width.

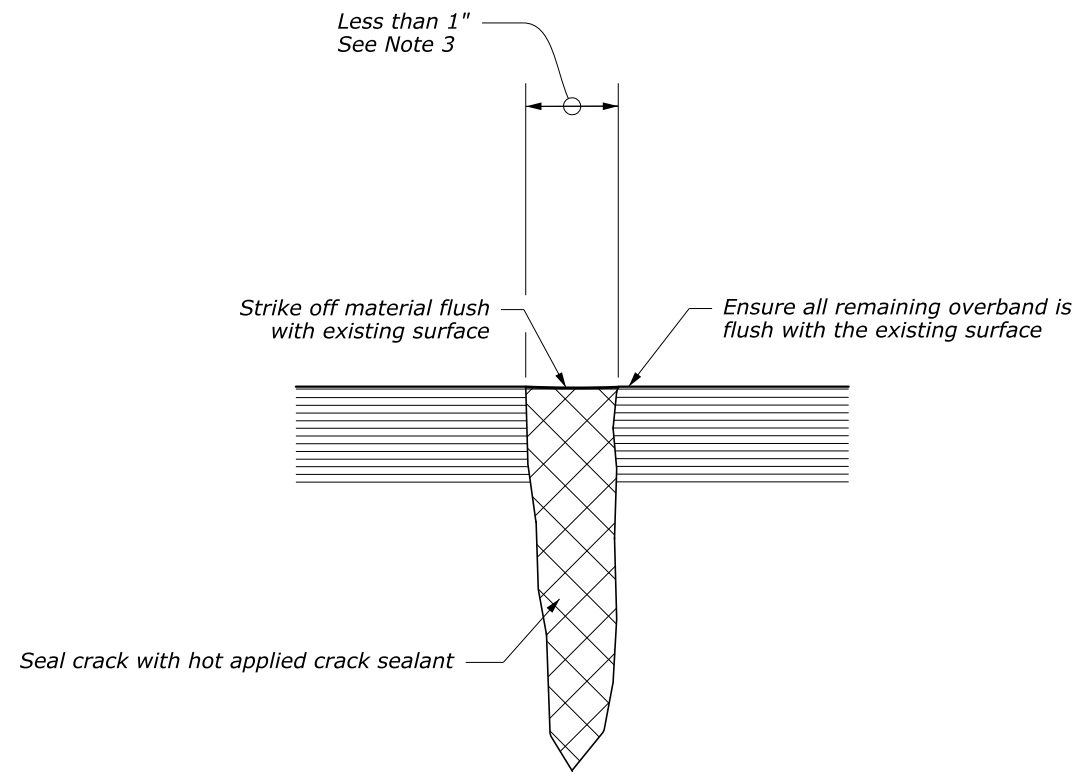

CRACK SEALING

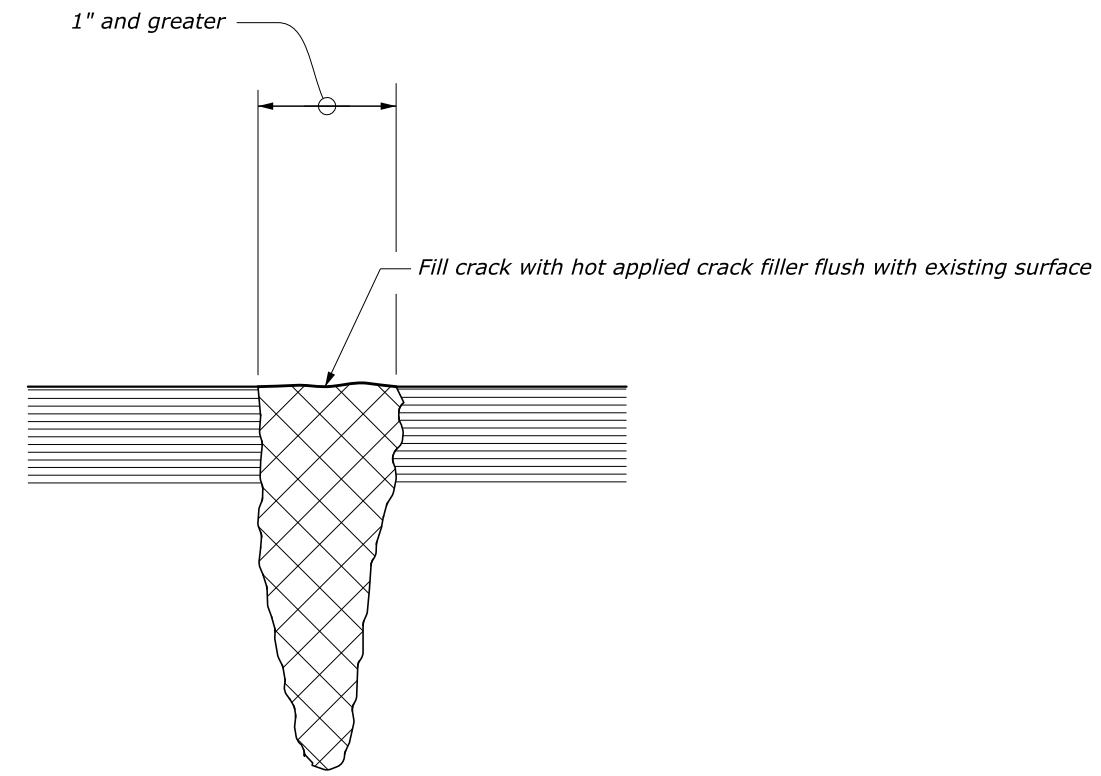

CRACK FILLING

CRACK SEALING AND FILLING

08-Nov-2021 10:11 AM M:\Standards_and_Details\EFLHD_Detail\Drawings\FP-A2-V01_Version\Section 414\Updates_Warning_Docs\41401_detail.dgn

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
CRACK SEALING AND FILLING ASPHALT PAVEMENT	
DETAIL APPROVED FOR USE APPROVED: JUNE 2015 REVISED: SEPTEMBER 2017	DETAIL E414-01