


SIDEWALK WITH CURB

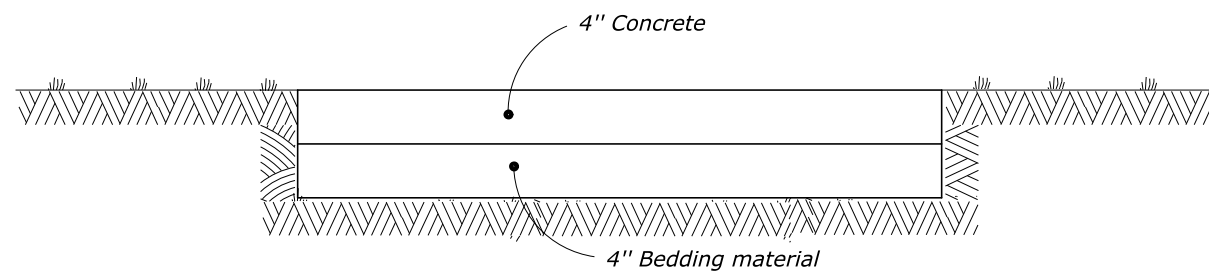

SIDEWALK

NOTES:

1. Place $\frac{3}{4}$ -inch transverse expansion joints at intervals of not more than 20 feet to match adjacent curb expansion joints.
2. Place contraction joints at intervals equal to the width of the sidewalk as shown in the plans.
3. Install $\frac{1}{2}$ -inch preformed expansion joint filler conforming to Subsection 712.01(b)(1).

26-May-2015 07:52 AM M:\Standards_and_Details\EF\LD_Detail\Drawings\FP-A\std1501_detail.dgn

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
CONCRETE SIDEWALK	
DETAIL APPROVED FOR USE	DETAIL
APPROVED : MAY 2011 REVISED: APRIL 2015	E615-01