



NOTES:


1. Use a coarse broom finish running perpendicular to the longitudinal slope on concrete surfaces, exclusive of the detectable warning surfaces.
2. Ensure the cross slopes of ramps do not exceed 2% in the direction perpendicular to the pedestrian traffic.
3. Construct curb ramp perpendicular to the curb, as shown in the plans, or as directed by the CO.

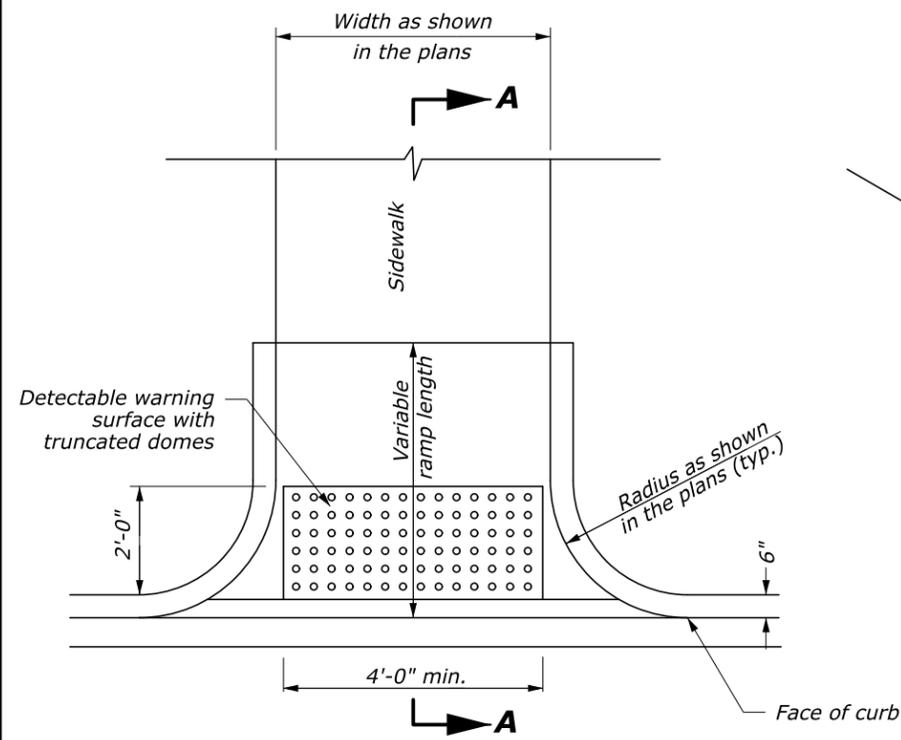

PLAN VIEW

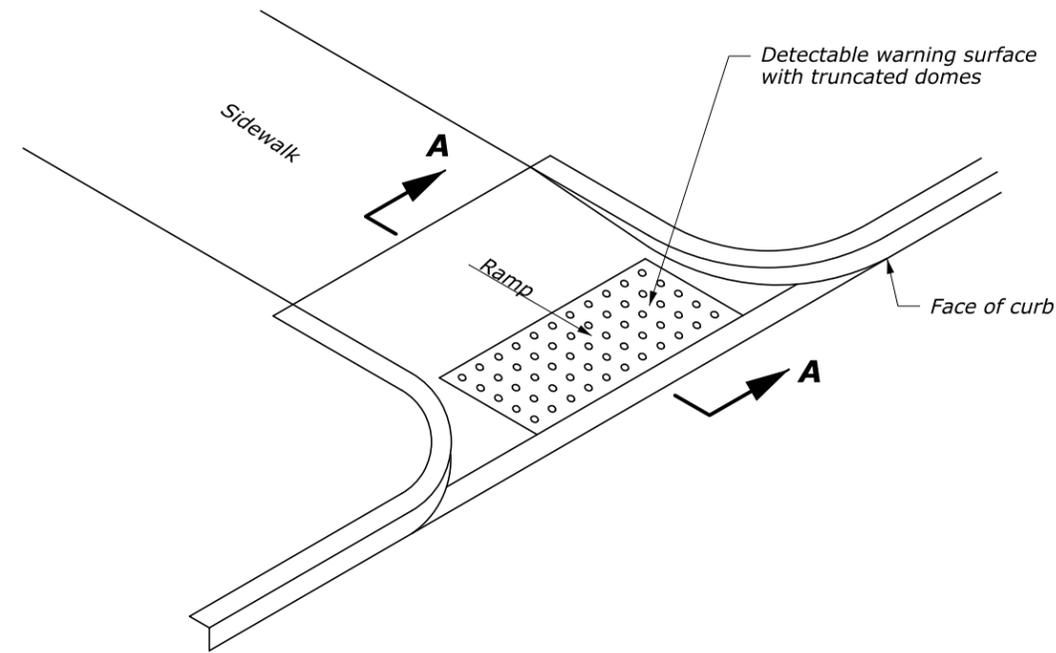


ISOMETRIC VIEW

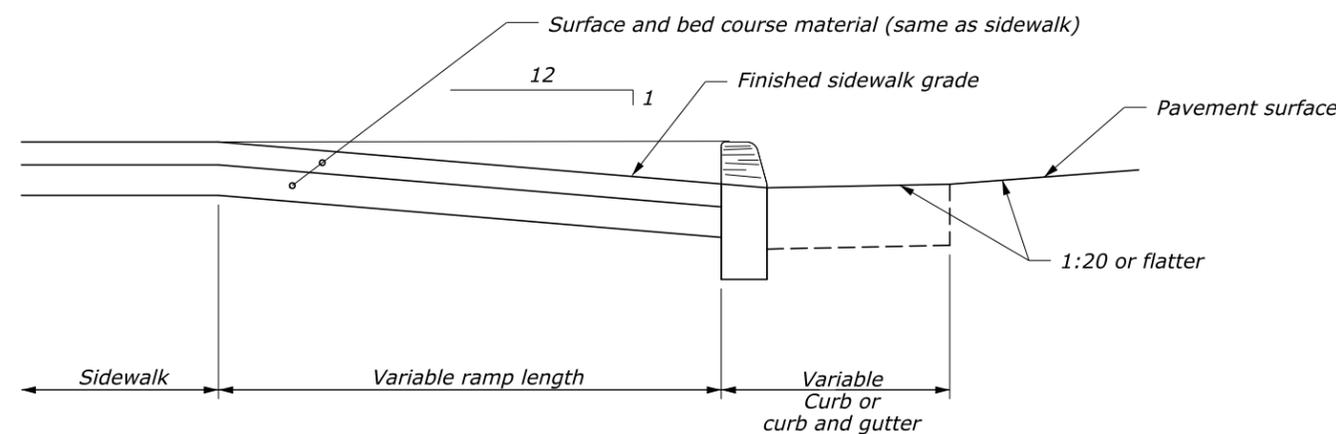


SECTION A-A

ACCESSIBILITY RAMP

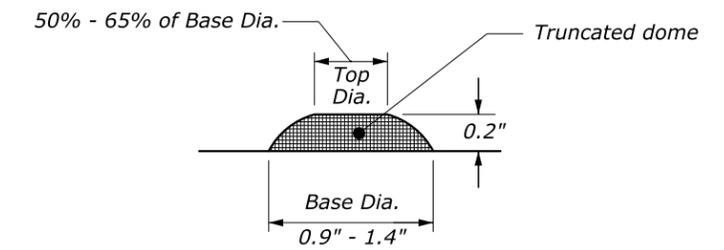

ELEVATION VIEW

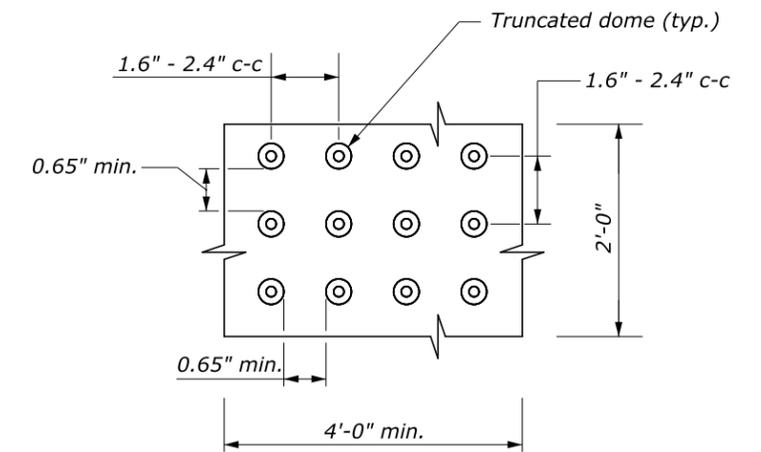

PLAN VIEW

SIZE AND SPACING OF TRUNCATED DOMES

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
ACCESSIBILITY RAMP CURB RETURN	
DETAIL APPROVED FOR USE	DETAIL
APPROVED: MARCH 2015 REVISED: JUNE 2017	E615-05

NO SCALE