
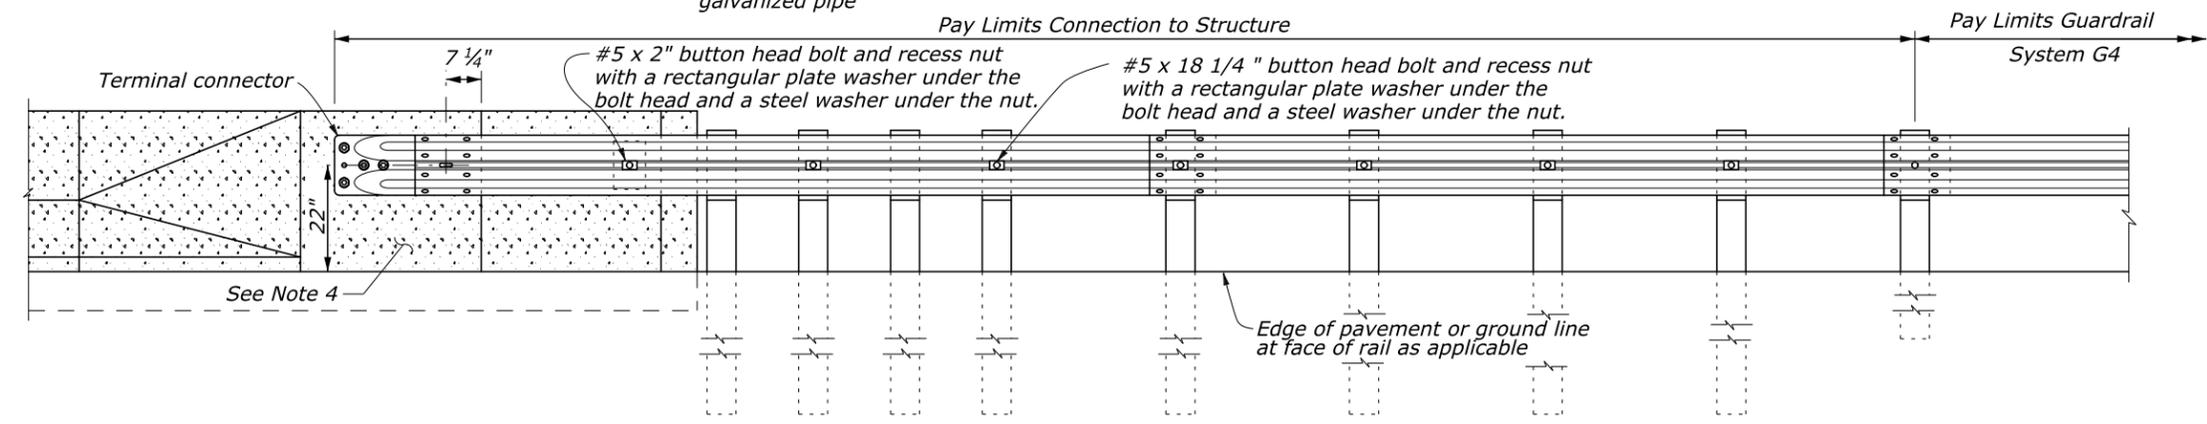


- NOTES:**
1. Reinforced concrete wall or bridge parapet must be capable of developing a 59.6 kips pull out strength.
 2. Connect steel spacer tube to rail element only.
 3. Where reinforced concrete flare back transition section is required, See Standard 617-32 or plan sheets, as appropriate, for details.

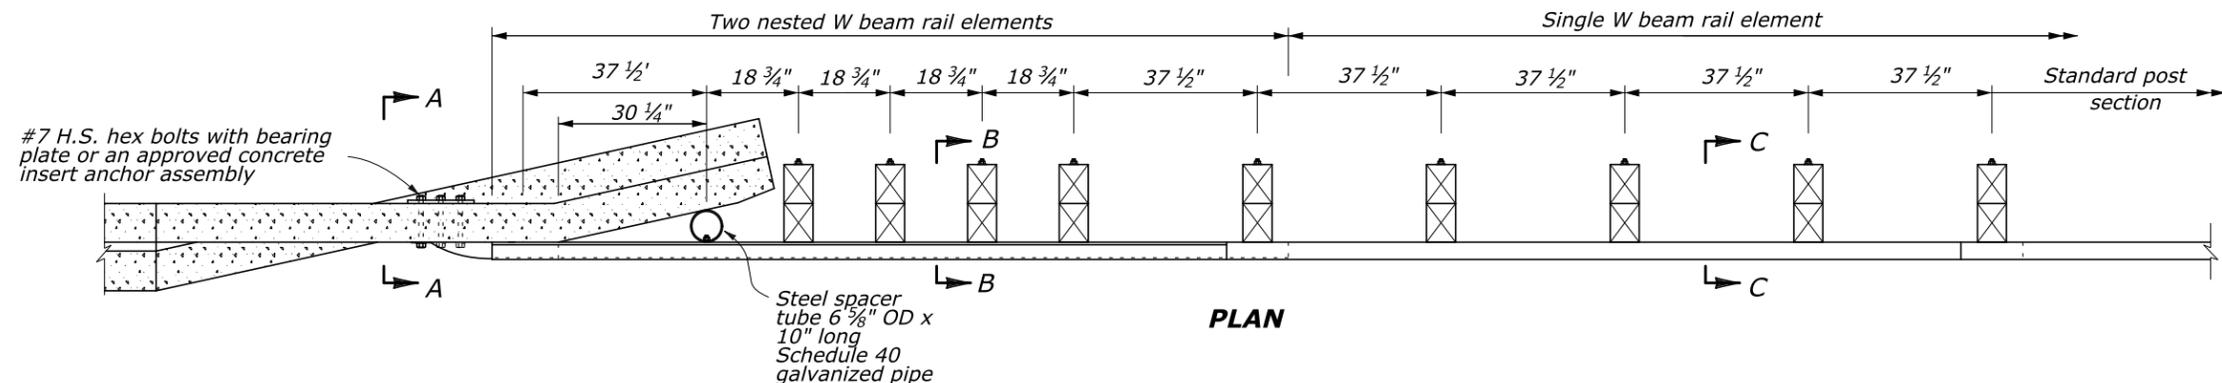

0:\Doc-2014-0233-PM\TIME\$ H:\Team_Folders\VIDU\6\FP_14_Detail_Review\ALL_FPI4_D01\ss61730_detail.dgn

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
G4 W BEAM GUARDRAIL CONNECTIONS TO STRUCTURE VERTICAL FLARED BACK WOOD POSTS	
DETAIL APPROVED FOR USE	DETAIL
APPROVED: MAY 2011 REVISED: SEPTEMBER 2014	E617-30