


NOTE:
Apply seed and fertilizer as recommended by the manufacturer before placing the rolled erosion control product.


INSTALLATION PROCEDURES

Install Rolled Erosion Control Product (RECP) along the bottom of the ditch and up the side slopes as follows:


Step 1: Bury the top end of the RECP mat strip in a trench 6 inches or more deep.





Step 2: Tamp the trench full of soil. Secure with row of fasteners spaced at 6-inch centers and placed 4 inches down from the trench.




Step 3: Overlap by burying the upper end of lower RECP mat strip as in step 1 and 2. Overlap end of top strip 4 inches and fasten.




Step 4: Construct erosion stop (check slot) at 50-foot intervals. Bury fold of RECP mat in slit trench and tamp. Fasten with double row of fasteners. See Section A-A

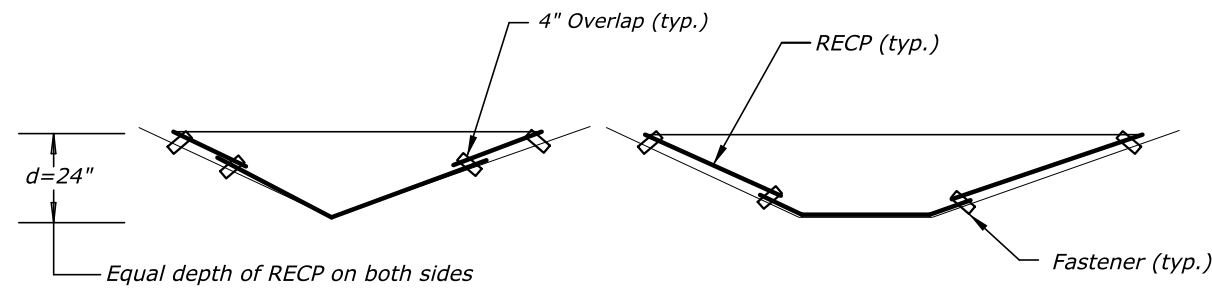

CROSS SECTION THROUGH V AND FLAT BOTTOM DITCHES

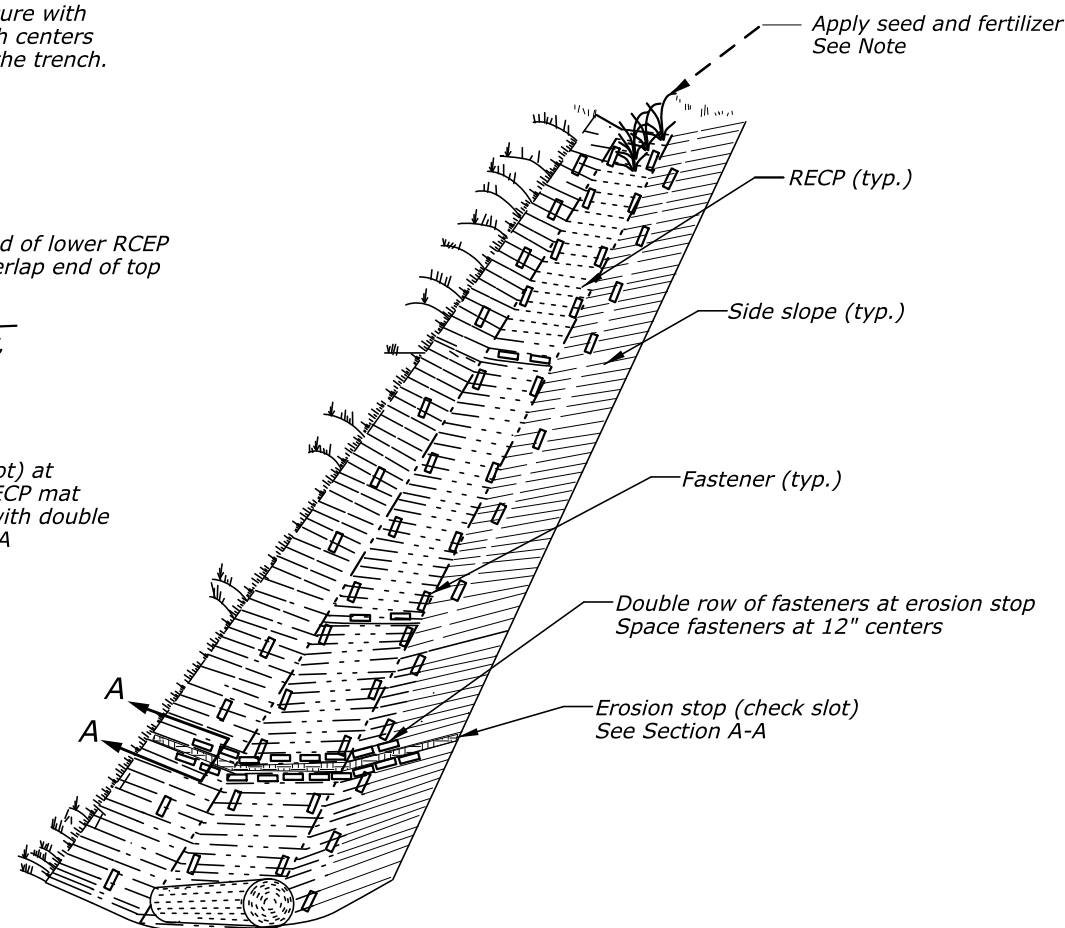



DITCH STABILIZATION WITH RECP

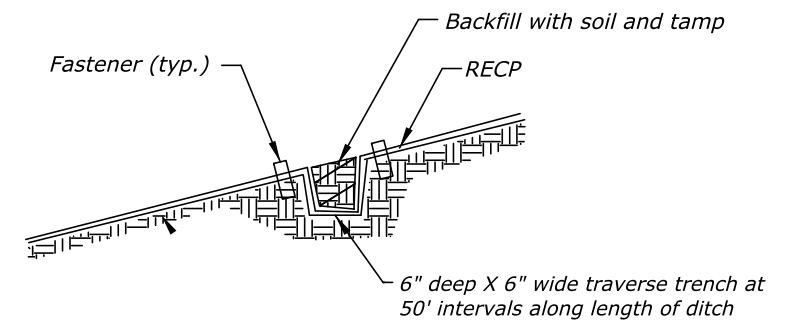

**SECTION A-A
EROSION STOP (CHECK SLOT)**

Wood Stakes
1" X 3" stock cut
into triangular shape

Typical staples
No. 11 gauge wire



**DETAIL A
TYPICAL GROUND FASTENERS**

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION	
U.S. CUSTOMARY DETAIL	
DITCH STABILIZATION WITH ROLLED EROSION CONTROL PRODUCT (RECP)	
DETAIL APPROVED FOR USE APPROVED: MAY 2011 REVISED: JANUARY 2021	DETAIL E629-02