

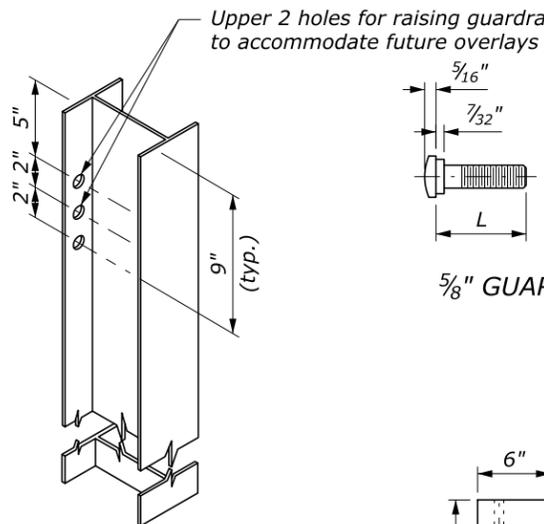


- NOTE:**
- When encountering impenetrable material, see ET Details 617-13 or 617-24.
 - See Special Contract Requirements when 7 foot or longer posts are specified.
 - See Special Contract Requirements when the alternative hole arrangement is specified.
 - Install delineator every fourth post. Fasten delineator to post using two galvanized 2" x 3/8" bolts with a washer on both sides, a lock washer, and nut; or fasten as specified by the manufacturer.
 - Modified block may be wood, plastic, or composite material. Use consistent material throughout the length of guardrail run.
 - Dimensional tolerances not shown or implied are intended to be those consistent with the proper functioning of the part, including its appearance, and accepted manufacturing practices.

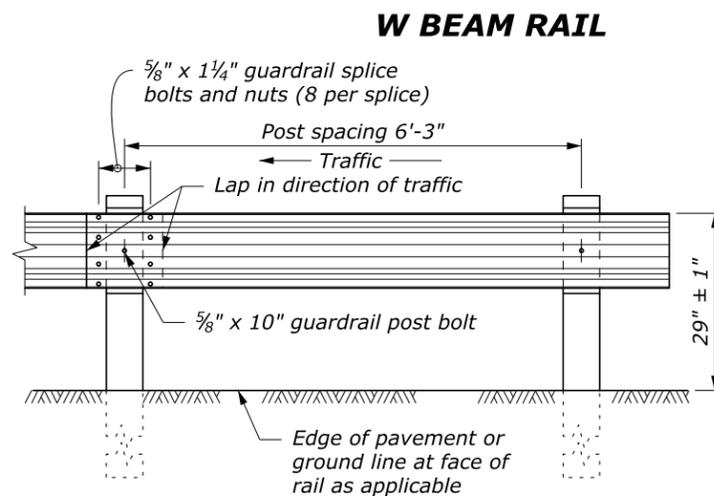


L	Thread Length
1 1/4"	1 1/8" minimum
2"	1 3/4" minimum
10"	4" minimum
18"	4" minimum
25"	4" minimum

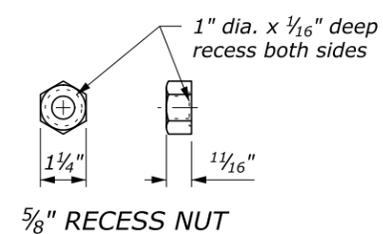




GUARDRAIL BOLT AND RECESS NUT

POST SPACING STANDARD POST SECTION

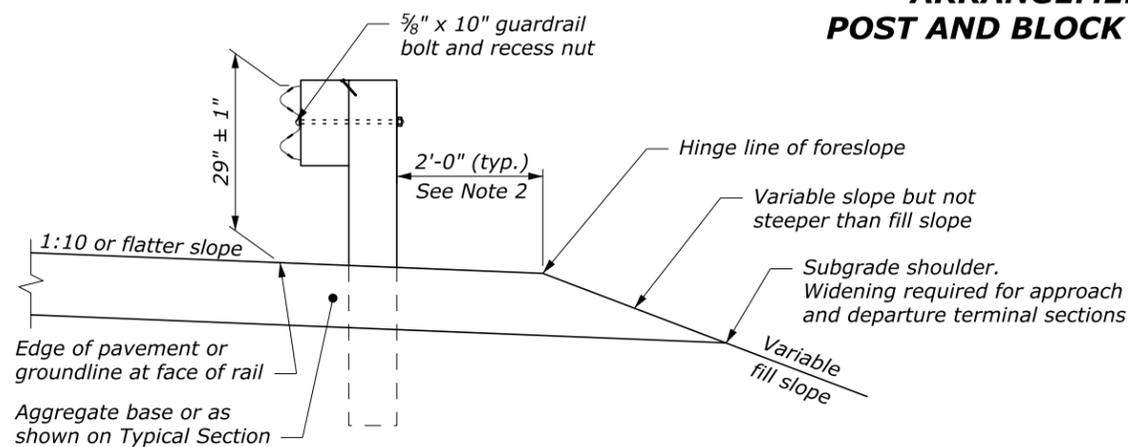

TYPICAL GUARDRAIL CROSS SECTION

ALTERNATE HOLE ARRANGEMENT POST AND BLOCK DETAIL

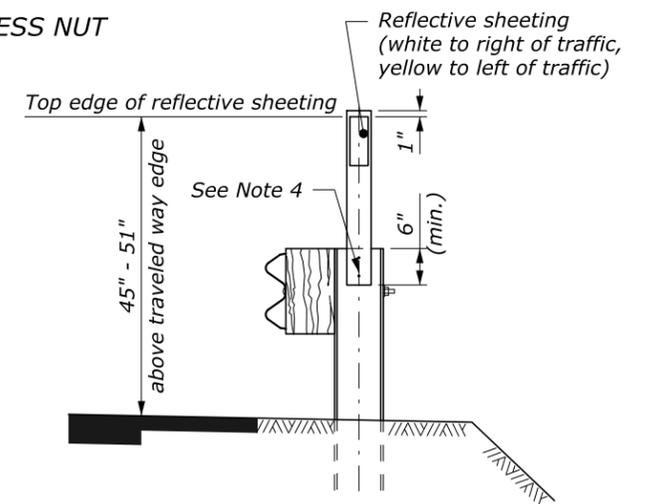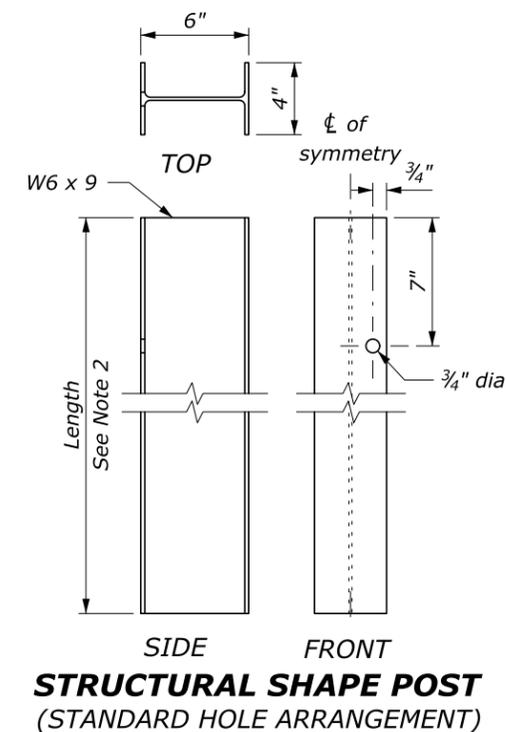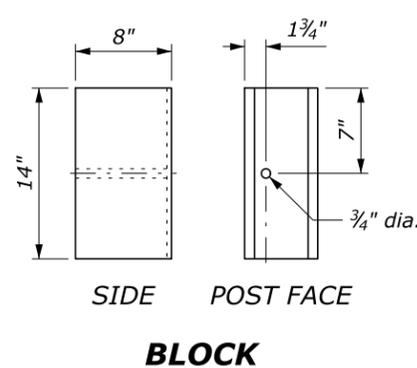

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION
EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

G4 W-BEAM GUARDRAIL STEEL POSTS

STANDARD APPROVED FOR USE 1/1994
REVISED: 4/1994 6/2005 9/2017 1/2018 12/2018

DETAIL
ET 617-11