



NOTE:

1. Use details shown as a general guide since manufacturer's details may vary. Install a tangent G4 W-beam guardrail terminal that meets NCHRP-350 or MASH requirements per manufacturer's recommendations. Ensure that terminal meets appropriate test level for the project.
2. Install terminal at a 1:25 taper or flatter, to position the end farther away from the edge of the shoulder, or use a taper per manufacturer's recommendations.
3. See manufacturer's drawings for other details.

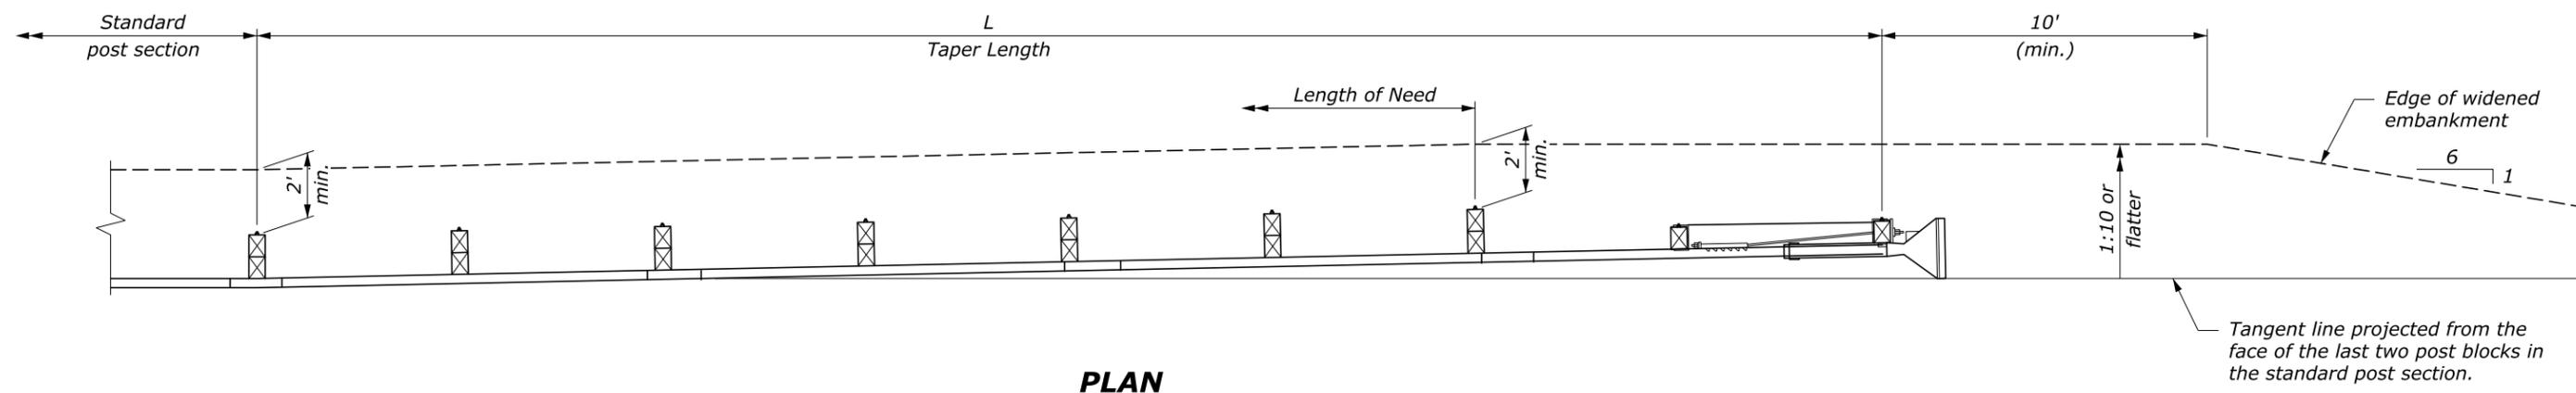

PLAN

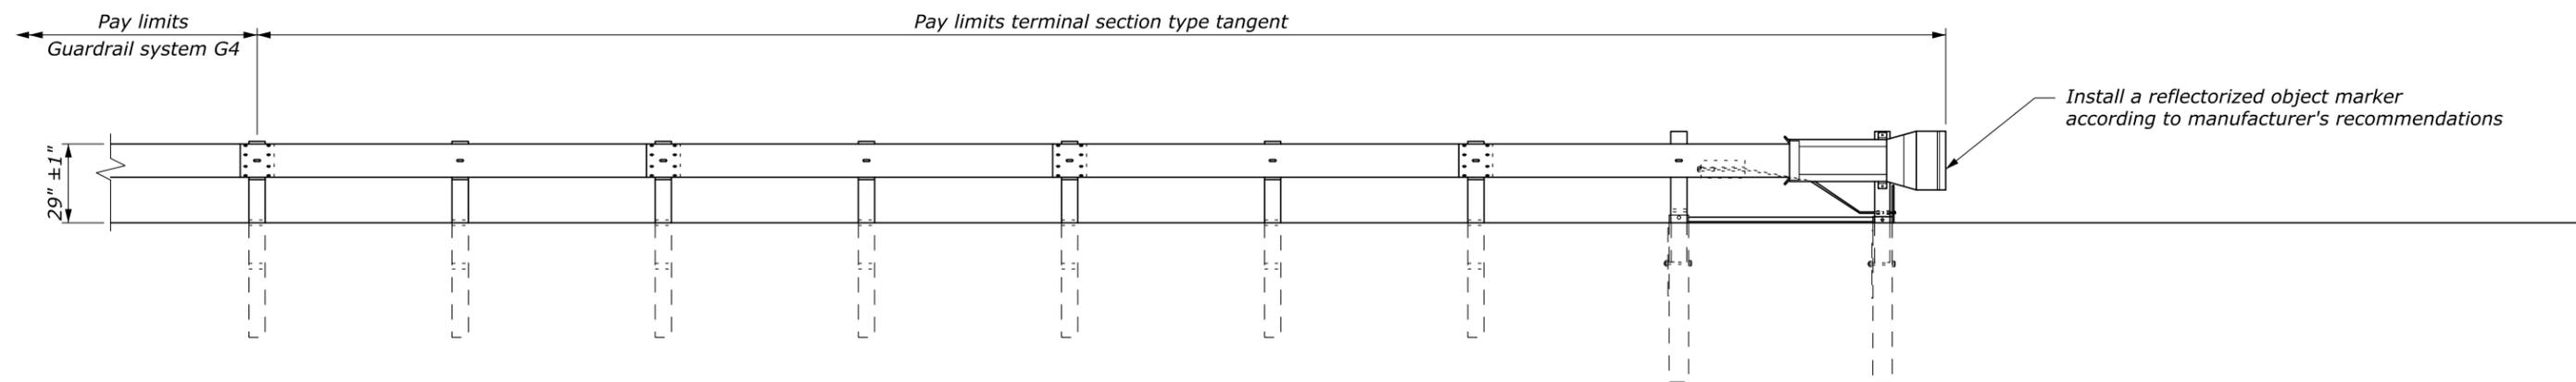

ELEVATION

TEST LEVEL	L (ft)
2 (≤ 45 mph)	25
3 (> 45 mph)	37.5 or 50

U.S. DEPARTMENT OF TRANSPORTATION
 FEDERAL HIGHWAY ADMINISTRATION
 EASTERN FEDERAL LANDS HIGHWAY DIVISION

U.S. CUSTOMARY DETAIL

**G4 W-BEAM GUARDRAIL
 TYPE TANGENT TERMINAL**

STANDARD APPROVED FOR USE 6/2005
 REVISSED: 3/2016 5/2016

DETAIL
 ET 617-20

NO SCALE