




**FLEXIBLE DELINEATOR**  
GROUND MOUNTED

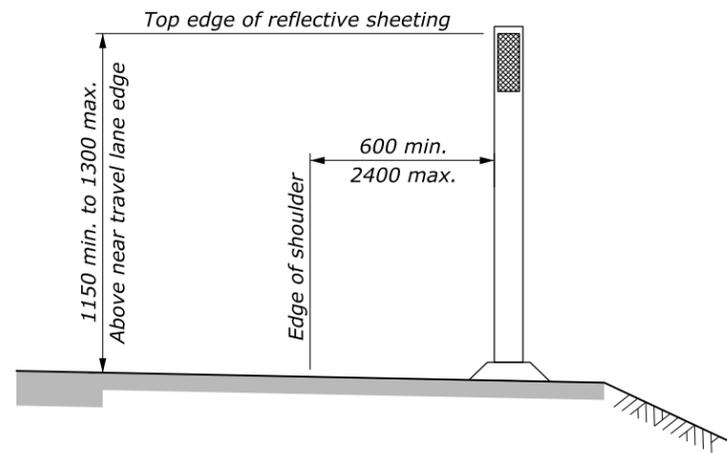

**FLEXIBLE DELINEATOR**  
SURFACE MOUNTED

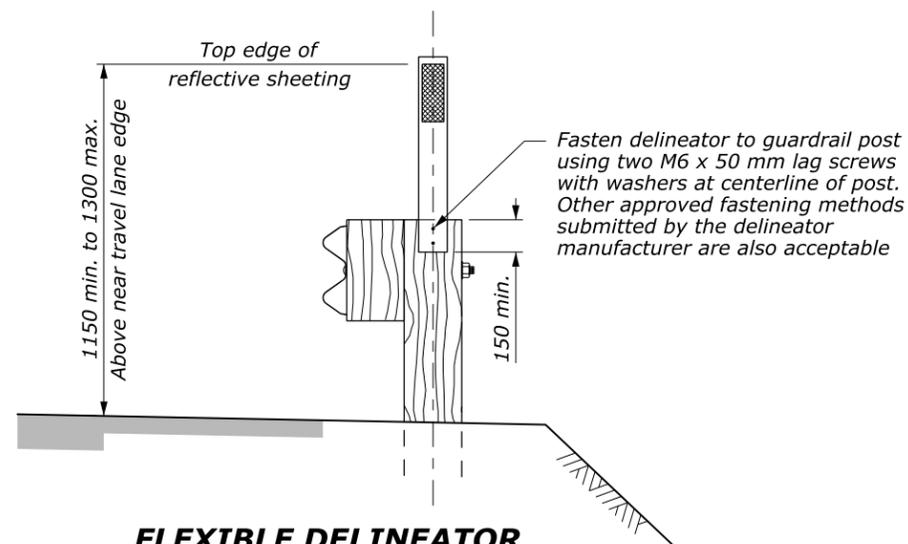


**FLEXIBLE DELINEATOR**  
GUARDRAIL MOUNTED OPTION  
(Use only with wood guardrail posts)

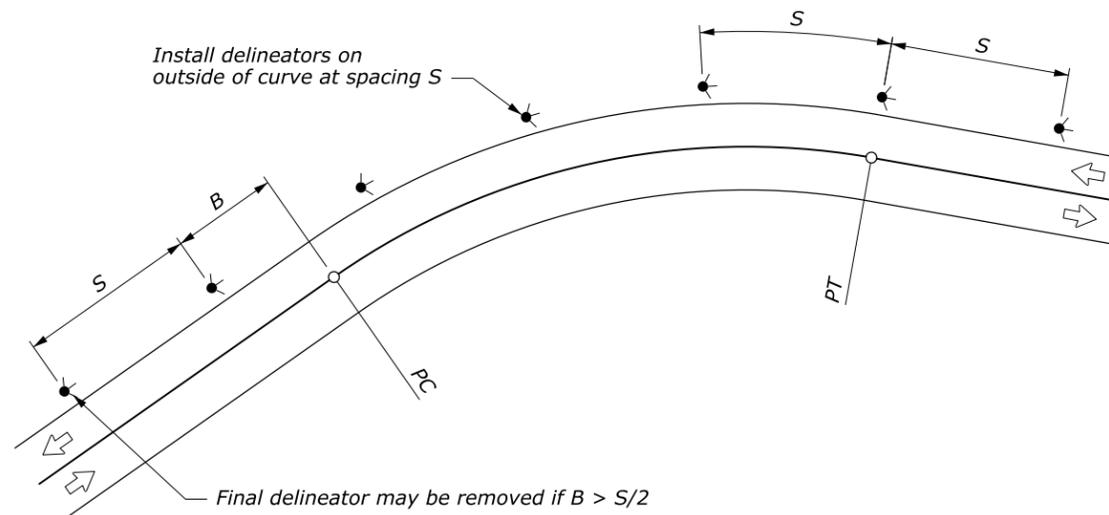


**PLACEMENT ON HORIZONTAL CURVES**

| DELINEATOR SPACING ON HORIZONTAL CURVES |                 |
|---|-----------------|
| CURVE RADIUS (m)                        | SPACING (S) (m) |
| 15                                      | 6               |
| 35                                      | 8               |
| 55                                      | 11              |
| 75                                      | 13              |
| 95                                      | 15              |
| 125                                     | 18              |
| 155                                     | 20              |
| 185                                     | 22              |
| 215                                     | 24              |
| 245                                     | 26              |
| 275                                     | 27              |
| 305                                     | 29              |

Spacing for a specific curve may be interpolated from the table, or calculated using the formula:  
 $Spacing = 1.7 \sqrt{R-15}$   
 The minimum spacing should be 6 meters.  
 Curve spacing should not exceed 90 meters.

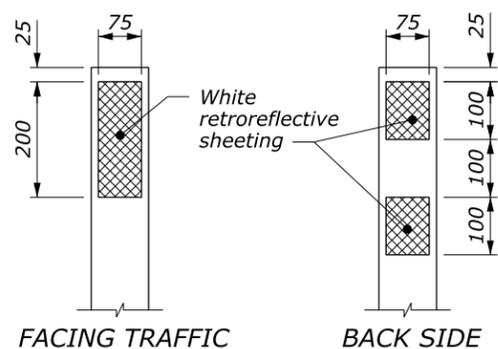

**REFLECTIVE SHEETING DETAIL**

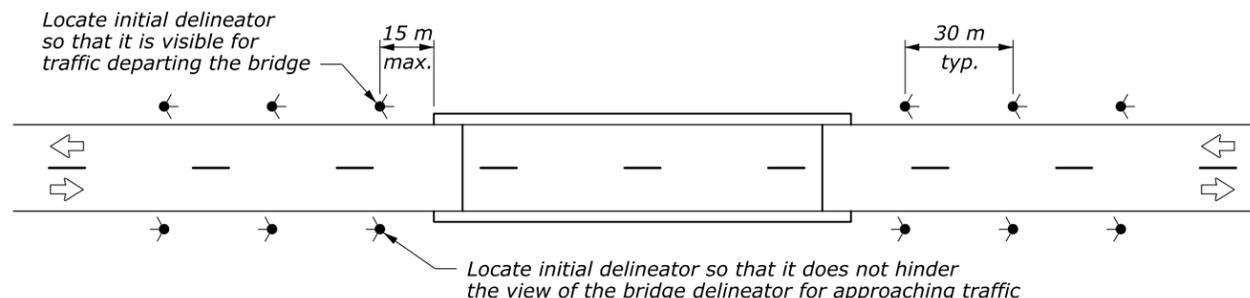

**PLACEMENT AT BRIDGE APPROACHES**

NO SCALE

|   |          |
|---|----------|
| U.S. DEPARTMENT OF TRANSPORTATION<br>FEDERAL HIGHWAY ADMINISTRATION<br>WESTERN FEDERAL LANDS HIGHWAY DIVISION |          |
| METRIC DETAIL   |          |
| <b>WASHINGTON<br/>DELINEATORS</b>   |          |
| DETAIL APPROVED FOR USE 1/2008  | DETAIL   |
| REVISED:  | WM633-80 |