STATE	PROJECT	SHEET NUMBER

U.S. DEPARTMENT OF THE INTERIOR

U.S. FISH AND WILDLIFE SERVICE

LAKE OPHELIA NATIONAL WILDLIFE REFUGE

PLANS FOR PROPOSED

PROJECT RRP-LOP 10(2)

UPGRADE LAKE LONG ROAD TO A TWO-LANE GRAVEL ROAD, IMPROVEMENT DRAINAGE, & REHABILITATE NINE PARKING AREAS

AVOYELLES PARISH, LOUISIANA

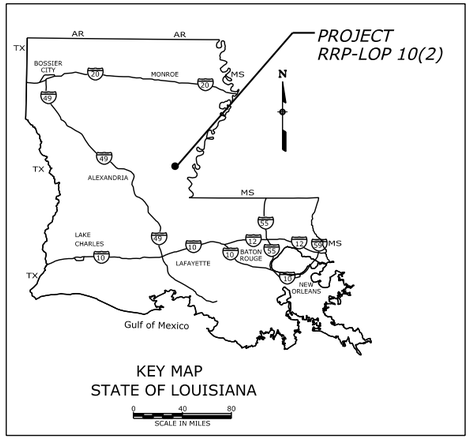

INDEX TO SHEETS

SHEET NO	DESCRIPTION
A01	Title Sheet
A02	Symbols And Abbreviations
A03	Location Map
B01	Typical Section
C01	Tabulation of Quantities
D01-D05	Plans And Profiles
M01	Erosion Control Narrative
P01-P02	Permanent Signing & Pavement Marking Plan
S01-S03	Standards And Details
T01-T12	Roadway Cross Sections

DESCRIPTION OF PROJECT

IMPROVEMENT: Rehabilitation and drainage improvement

PROJECT LENGTH: 6.88 Miles

LANE MILES:

ROAD:	WIDTH	SURFACE	BASE	SUBGRADE
Lake Long Road (New)	20'	8" ABC	N/A	N/A
Lake Long Road (Existing)	20'	8" ABC	N/A	N/A
Parking Area (Existing)	20'	8" ABC	N/A	N/A

BRIDGE: (Structure Name, Structure No. , Last date of inspection)

DESIGN DESIGNATION:

ADT (2006)	60
ADT (2026)	85
DHV	10
D	50/50
%Truck	1%
V (MPH)	40
C/A	None
e(max)	6%

SPECIFICATIONS:

"Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects", FP-14.

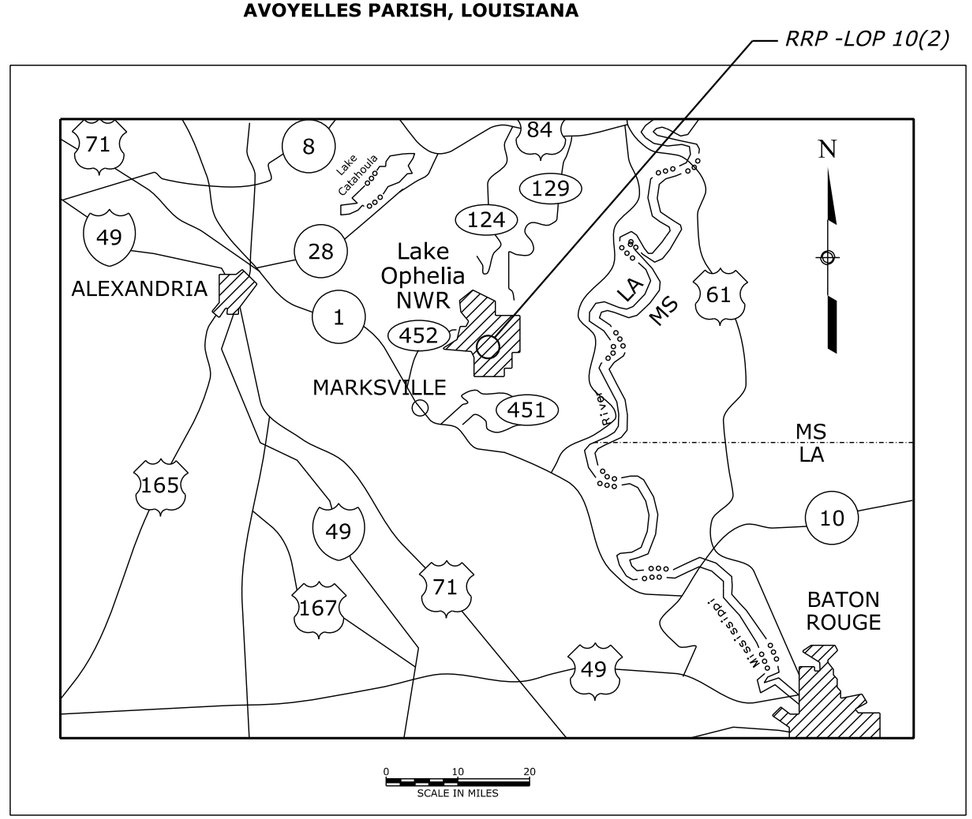

Schedule	Description	Station to Station	Length (miles)	RIP Milepost/ Cycle #

Know what's **below.** **Call** before you dig.

30% PLANS

PLANS PREPARED BY

U.S. Department of Transportation
Federal Highway Administration

EASTERN FEDERAL LANDS HIGHWAY DIVISION
ASHBURN, VIRGINIA
FEBRUARY, 2021

SAMMS # 10040592

Project Manager	Highway Design Manager	Lead Designer
XXXXX XXXXXX	XXXXX XXXX	XXXXX XXXX

10-Feb-2021 01:26 PM M:\Engineering_Software\Cadd_resource_v8i\Standard_Shts\Titles\Refuge\Refuge_H1.dgn